


TITAN TUBING ELEVATOR

TITAN TUBING ELEVATORS are constructed of high-quality alloy steel and heat-treated for maximum strength and durability. Each elevator is manufactured and tested to API 8C. In addition, the load collar is flame hardened for increased abrasion resistance.

All TITAN Tubing Elevators are equipped with a double locking retainer assembly for maximum safety.



License No. 8C-0069

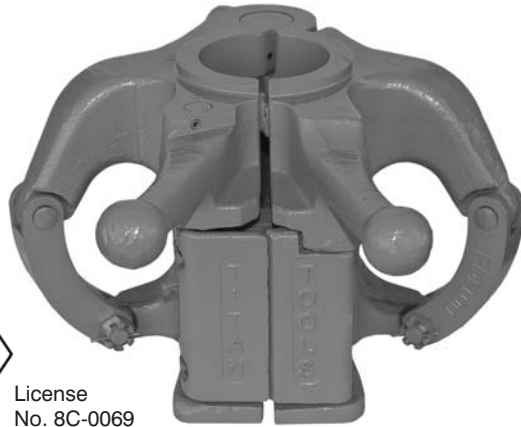

CATALOG NO.	TUBING SIZE	WEIGHT	RATED LOAD
TEA035-238N	2-3/8" Non-Upset	53 lbs.	35 tons
TEA035-238U	2-3/8" External Upset	53 lbs.	35 tons
TEA035-278N	2-7/8" Non-Upset	52 lbs.	35 tons
TEA035-278U	2-7/8" External Upset	52 lbs.	35 tons
TEA100-238N	2-3/8" Non-Upset	116 lbs.	100 tons
TEA100-238U	2-3/8" External Upset	116 lbs.	100 tons
TEA100-278N	2-7/8" Non-Upset	114 lbs.	100 tons
TEA100-278U	2-7/8" External Upset	114 lbs.	100 tons
TEA100-312N	3-1/2" Non-Upset	112 lbs.	100 tons
TEA100-312U	3-1/2" External Upset	112 lbs.	100 tons

WARNING! Improper use of tubing elevators may result in INJURY OR DEATH!
Do Not Exceed Rated Load!
Follow safe practices listed in Data Book.

KEY NO.	ITEM DESCRIPTION	NO. REQ'D.
1,2	HINGE PIN W / SPRING PIN	1
3	RETAINER	1
4	RETAINER SPRING	1
5	RETAINER GREASE FITTING	2
6,7	RETAINER PIN W / SPRING PIN	1
8	LOCK	1
9	LOCK SPRING	1
10,11	LOCK PIN W / SPRING PIN	1
12	TIE BAR	2
13	TIE BAR RIVET	2
14,15,16	TIE BAR BOLT, NUT & COTTER	2
17	RIGHT BODY GREASE FITTING	2
18	LEFT BODY*	1
19	RIGHT BODY*	1

*KEY NOS. 18 AND 19 ARE NOT AVAILABLE AS INDIVIDUAL COMPONENTS.

