


PETOL SLIM GRIP TONGS



PETOL SLIM GRIP TONGS are designed to meet the need when a “pipe wrench” with a torque rating is required to make up or break out connections having narrow gripping areas. The tongs are self-adjusting and ratchet easily. Simply stab the tongs onto the workpiece and you’re ready to go.

Equipped with hand grips for ease in placing the tongs on top of or underneath the workpiece.

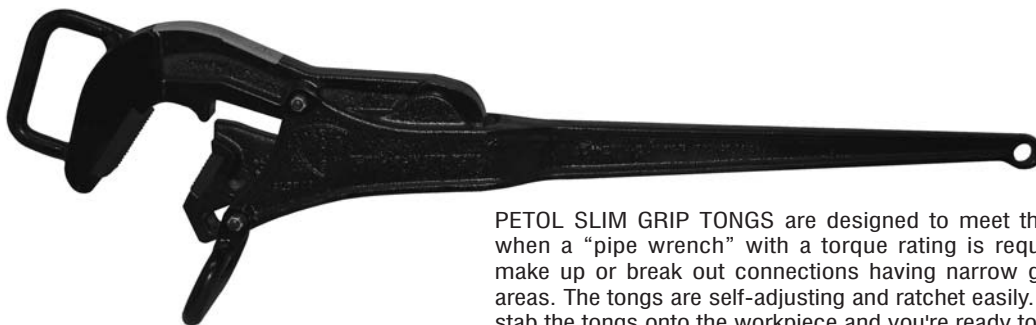

CATALOG NO.	O.D.*	GRIPPING WIDTH	HANDLE LENGTH	WEIGHT	MAXIMUM WORKING LOAD
SLG10	1" – 2-1/4"	1.19"	16"	9 lbs.	1,500 ft.-lbs.
SLG13	2-3/8" – 4"	1.75"	28"	44-1/2 lbs.	5,000 ft.-lbs.
SLG15	3-3/4" – 6-1/2"	1.25"	33"	55 lbs.	7,500 ft.-lbs.

WARNING!
 Protect yourself and others from
SERIOUS INJURY OR DEATH!
 Do Not Exceed Maximum Working Load!
 Follow OSHA, NSC, etc. standards, safe practices,
 and procedures.

NOTE: PARTS MAY VARY SLIGHTLY AMONG SIZES. CALL FACTORY FOR DETAILS.

KEY NO.	ITEM DESCRIPTION	NO. REQ'D.
1	HANDLE	1
2	HANGER	1
3	LOWER JAW	1
4	UPPER JAW	1
5	LOWER JAW INSERT	1
6	UPPER JAW INSERT	1
7	INSERT KEY*	2
8	INSERT KEY SPRING*	2
9	LOWER JAW BUSHING	1
10	SPRING	1
11	UPPER JAW BUSHING	1
12,13	LOWER JAW BOLT & NUT	1
14,15	UPPER JAW BOLT & NUT	1

*SLG10 TONG REQUIRE A CAP SCREW IN PLACE OF INSERT KEY(7) AND INSERT KEY SPRING(8).

