


OFFSET HEXAGON KEY WRENCHES

Beta's hexagon key wrenches have been designed for long, accurate operation. The wide range covers all use requirements: the extra-short, short, long, extra-long, ball head and T-wrenches as well as the wrenches with high torque handles are among Beta's flagship products and are unrivalled in the market.



The ball head offset hexagon key wrenches allow operation at an angle of up to 30° to the screw axis.

The keys are packaged in a wallet for quick identification of the required size. When closed, it prevents the wrenches, including the smaller ones, from accidentally coming out.

The Color version combines the outstanding features of the standard wrenches with immediate identification of the required size to speed up daily work.



96/B8	2-2,5-3-4-5-6-8-10 mm	5	000960386
96/B10	1,5-2-2,5-3-4-5-6-8-10-12 mm	5	000960380
96N/BV		1	000960651



96/SC9	1,5-2-2,5-3-4-5-6-8-10 mm	1	000960374
96/SCV		1	000960985



96/SC12	2-2,5-3-3,5-4-4,5-5-6-7-8-9-10 mm	1	000960395
96/SCV12		1	000960975

96

offset hexagon key wrenches
chrome-plated



ISO 2936

mm	L mm	L1 mm		
0,9	35	8	20	000960013
1,3	39	10	20	000960014
1,5	45	15	20	000960015
2	50	17	20	000960020
2,5	57	20	20	000960025
3	64	22	20	000960030
3,5	68	25	20	000960035
4	72	28	20	000960040
4,5	78	30	20	000960045
5	83	32	20	000960050
5,5	88	35	20	000960055
6	94	37	20	000960060
7	99	40	10	000960070
8	105	43	10	000960080
9	111	46	10	000960090
10	119	49	10	000960100
11	126	52	10	000960110
12	134	56	10	000960120
13	142	62	10	000960130
14	151	69	10	000960140
16	165	75	5	000960160
17	174	79	5	000960170
19	196	88	5	000960190
22	216	100	3	000960220
24	242	112	1	000960240
27	271	125	1	000960270
30	309	140	1	000960300
32	341	155	1	000960312
36	385	174	1	000960316



96/ST6	2,5-3-4-5-6-8 mm	3	000960370
---------------	------------------	---	-----------



96/BGS7	1,5-2-2,5-3-4-5-6 mm	1	000960367
----------------	----------------------	---	-----------



96/BG7	2,5-3-4-5-6-8-10 mm	1	000960368
---------------	---------------------	---	-----------

96N

offset hexagon key wrenches,
burnished



ISO 2936

mm	L mm	L1 mm		
0,9	32	10	20	000960409
1,3	44	12	20	000960413
1,5	46	15	20	000960415
2	51	17	20	000960420
2,5	57	20	20	000960425
3	64	22	20	000960430
3,5	68	25	20	000960435
4	72	28	20	000960440
4,5	78	30	20	000960445
5	83	32	20	000960450
6	94	37	20	000960460
7	99	40	10	000960470
8	105	43	10	000960480
9	111	46	10	000960490
10	119	49	10	000960500
11	126	52	10	000960510
12	134	56	10	000960520
13	142	62	10	000960530
14	151	69	10	000960540
16	165	72	5	000960560
17	174	79	5	000960570
19	194	88	5	000960590
22	216	99	1	000960592
24	242	111	1	000960594



96N/ST6
2,5-3-4-5-6-8 mm

3 000960640



96N/G7
2,5-3-4-5-6-8-10 mm
96N/G7A
1,5-2-2,5-3-4-5-6 mm

3 000960645
3 000960643



96N/B10
1,5-2-2,5-3-4-5-6
8-10-12 mm
96N/BV

5 000960650
1 000960651



96N/SC9
1,5-2-2,5-3-4-5-6-8-10 mm
96N/SCV

1 000960644
1 000960986



96N/SC12
2-2,5-3-3,5-4-4,5-5
6-7-8-9-10 mm
96N/SCV12

1 000960661
1 000960976

96C/AS

offset hexagon key wrenches,
chrome-plated



"	L mm	L1 mm	g		
1/16	46	16	1,01	20	000961702
3/32	53	19	2,70	20	000961706
1/8	60	22	5,33	20	000961710
5/32	67	25	9,33	20	000961714
3/16	74	28	14,87	20	000961716
7/32	81	32	22,00	20	000961718
1/4	89	35	31,40	20	000961720
5/16	103	40	56,16	10	000961724
3/8	117	45	91,31	10	000961728



96C-AS/SC9
1/16-3/32-1/8-5/32-3/16-
7/32-1/4-5/16-3/8

1 000961753

96AS

offset hexagon key wrenches,
burnished



"	L mm	L1 mm		
1/30 (0,035")	44	14	20	000960698
1/20 (0,050")	44	15	20	000960701
1/16	46	16	20	000960702
5/64	50	18	20	000960704
3/32	53	19	20	000960706
7/64	57	21	20	000960708
1/8	60	22	20	000960710
9/64	64	24	20	000960712
5/32	68	25	20	000960714
3/16	75	29	20	000960716
7/32	82	32	20	000960718
1/4	89	35	20	000960720
5/16	103	40	10	000960724
3/8	117	44	10	000960728
7/16	132	49	10	000960730
1/2	149	54	10	000960732
9/16	151	69	2	000960734
5/8	165	72	1	000960736
3/4	194	88	1	000960738



96AS/SC9
1/16-3/32-1/8-5/32-3/16
7/32-1/4-5/16-3/8

1 000960743

96AS/SCV 1 000960744



96AS/T7
3/32-1/8-5/32
3/16-7/32-1/4-5/16

3 000960740



96AS/BG7
3/32-1/8-5/32-3/16
1/4-5/16-3/8

1 000960747



96AS/B11
1/20-1/16-5/64-3/32
1/8-5/32-3/16-7/32
1/4-5/16-3/8
96N/BV

1 000960749

1 000960651



96LC

offset hexagon key wrenches,
long series, chrome-plated



ISO 2936

mm	L mm	L1 mm		
2	101	17	20	000960320
2,5	113	20	20	000960321
3	127	22	20	000960322
3,5	138	25	20	000960323
4	142	28	20	000960324
4,5	154	28	20	000960325
5	163	32	20	000960326
6	184	37	20	000960327
7	194	40	10	000960328
8	205	43	10	000960329
9	216	46	10	000960330
10	231	49	10	000960331
12	259	56	10	000960332





96LC/SC8
2-2,5-3-4-5-6-8-10 mm
96LC/SCV

1 000960334
1 000960983



96LC/SC12
2-2,5-3-3,5-4-4,5-5-6-7-8-9-10 mm
96LC/SCV12

1 000960337
1 000960977

96L
offset hexagon key wrenches,
long series, burnished



ISO 2936

mm	L mm	L1 mm	
2	99	15	20 000960820
2,5	110	17	20 000960825
3	124	19	20 000960830
3,5	135	21	20 000960835
4	138	24	20 000960840
4,5	150	25	20 000960845
5	158	27	20 000960850
6	178	31	20 000960860
7	187	33	10 000960870
8	197	35	10 000960880
9	207	37	10 000960890
10	221	39	10 000960900
12	247	44	10 000960920



96L/SC8
2-2,5-3-4-5-6-8-10 mm
96L/SCV

1 000960924
1 000960987



96L/SC12
2-2,5-3-3,5-4-4,5-5-6-7-8-9-10 mm
96L/SCV12

1 000960929
1 000960978

96BP-CL

ball head offset hexagon key wrenches,
chrome-plated,
coloured



mm	L mm	L1 mm	
1,5	91	16	5 000961600
2	102	17	5 000961601
2,5	113	21	5 000961602
3	128	23	5 000961603
4	143	28	5 000961604
5	163	33	5 000961605
6	185	37	5 000961606
8	206	43	2 000961608
10	231	50	2 000961610




96BP-CL/SC9
1,5-2-2,5-3-4-5-6-8-10 mm
96BP-CL/SCV

1 000961619
1 000961629

96BPC

ball head offset hexagon key wrenches
chrome-plated

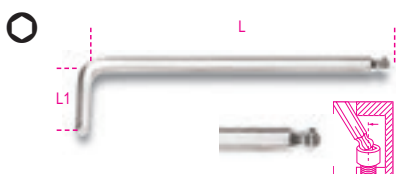

mm	L mm	L1 mm	
1,5	79	13	10 000960340
2	84	15	10 000960341
2,5	89	17	10 000960342
3	99	19	10 000960343
4	108	24	10 000960344
5	126	27	10 000960345
6	148	31	10 000960346
7	157	33	5 000960353
8	168	35	5 000960347
10	187	39	5 000960348
12	220	55	5 000960352




96BPC/SC9
1,5-2-2,5-3-4-5-6-8-10 mm
96BPC/SCV

1 000960354
1 000960984

96BP

ball head offset hexagon key wrenches
burnished

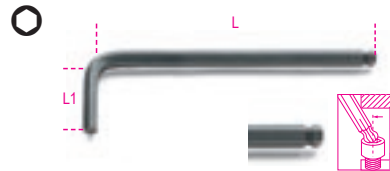

mm	L mm	L1 mm	
1,5	79	13	10 000960960
2	84	15	10 000960961
2,5	89	17	10 000960962
3	99	19	10 000960963
4	108	24	10 000960965
5	126	27	10 000960967
6	148	31	10 000960968
8	168	35	5 000960970
10	187	39	5 000960972
12	220	55	5 000960973



96BP/SC9
1,5-2-2,5-3-4-5-6-8-10 mm
96BP/SCV

1 000960974
1 000960988

96LBP

ball head offset hexagon key wrenches,
extra-long model



mm	L mm	L1 mm	
1,5	90	15	5 000961340
2	100	17	5 000961341
2,5	112	20	5 000961342
3	127	22	5 000961343
4	144	27	5 000961344
5	163	32	5 000961345
6	184	37	5 000961346
8	204	44	2 000961348
10	230	49	2 000961350




96LBP/SC9
1,5-2-2,5-3-4-5-6-8-10 mm
96LBP/SCV

1 000961354
1 000961984

96BP/AS

ball head offset hexagon wrenches
burnished

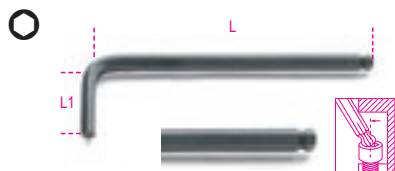

"	L mm	L1 mm		
3/32	89	17	10	000960989
1/8	98	18	10	000960990
5/32	108	24	10	000960991
3/16	126	26	10	000960992
7/32	139	28	10	000960993
1/4	152	31	10	000960994
5/16	168	34	5	000960995
3/8	190	39	5	000960996



96BP-AS/SC9	1	000961000
1/16-3/32-1/8-5/32-3/16		
7/32-1/4-5/16-3/8		
96BP-AS/SCV	1	000961001



96BP-AS/8	1	000960997
3/32-1/8-5/32-3/16-7/32		
1/4-5/16-3/8		
96BP-AS/BV	1	000960998

96BPA

ball head offset hexagon wrenches, 110°,
extra-short side model



mm	L mm	L1 mm		
1,5	71	9	5	000961960
2	86	11	5	000961961
2,5	96	13	5	000961962
3	104	15	5	000961963
4	116	17	5	000961964
5	132	19	5	000961965
6	155	21	5	000961966
8	176	24	2	000961968
10	200	27	2	000961970



96BPA/SC9	1	000961974
1,5-2-2,5-3-4-5-6-8-10 mm		
96BPA/SCV	1	000961988

96T

OFFSET HEXAGON KEY WRENCHES

with high torque handles

Rapid and easy to handle

The small-size handle is perfectly balanced to quickly rotate in the palm of the hand. The ergonomic shape allows extremely high torques to be applied.

The hexagon ends have been designed to transmit the maximum possible torque to the screw.

The round blade has a homogenous frame compared to the hexagon blade and provides increased strength.



Blade passes through handle

96T

offset hexagon key wrenches,
with high torque handles



mm	L mm	L1 mm		
2	139	52	5	000960934
2,5	153	55	5	000960935
3	153	55	5	000960936
3,5	179	70	5	000960937
4	179	70	5	000960938
4,5	200	84	5	000960939
5	200	84	5	000960940
6	221	103	5	000960941
7	236	106	3	000960942
8	255	117	3	000960943
10	285	132	3	000960945



96T/S6	1	000960952
2-2,5-3-4-5-6 mm		
96T/S8	1	000960933
2-2,5-3-4-5-6-8-10 mm		
96T/S11	1	000960951
2-2,5-3-3,5-4-4,5-5-6-7-8-10 mm		



96T/SP11	1	000960957
2-2,5-3-3,5-4-4,5-5		
6-7-8-10 mm		
96T/SPV	1	000960958
96T/S11		
97TTX/S11		

96T/AS

offset hexagon key wrenches,
with high torque handles



"	L mm	L1 mm		
3/32	153	55	2	000960669
7/64	153	55	2	000960670
1/8	179	70	2	000960671
9/64	179	70	2	000960672
5/32	200	84	2	000960673
3/16	200	84	2	000960674
7/32	221	103	2	000960675
1/4	236	106	2	000960676
5/16	255	117	2	000960678
3/8	285	132	2	000960680



96T/AS8	1	000960682
3/32-7/64-1/8-5/32-3/16-1/4-5/16-3/8		
96T/AS10	1	000960683
3/32-7/64-1/8-9/64-5/32-3/16-7/32-1/4-5/16-3/8		

96TBP

ball head offset hexagon key wrenches with high torque handles



mm	L mm	L1 mm		
2,5	153	55	3	000960685
3	153	55	3	000960686
4	179	70	3	000960687
5	200	84	3	000960688
6	221	103	3	000960689
8	255	117	2	000960690
10	285	132	2	000960692



96TBP/S6
2,5-3-4-5-6-8 mm

97TX

offset key wrenches, for Torx® head screws



	L mm	L1 mm		
T6	42	16	5	000970006
T7	48	16	5	000970007
T8	48	16	5	000970008
T9	48	16	5	000970009
T10	51	17	5	000970010
T15	54	18	5	000970015
T20	57	19	5	000970020
T25	60	20	5	000970025
T27	64	21	5	000970027
T30	70	24	5	000970030
T40	76	26	5	000970040
T45	83	29	5	000970045
T50	95	32	5	000970050
T55	108	35	5	000970055
T60	120	38	5	000970060



97TX/ST8
T9-T10-T15-T20-T25
T27-T30-T40



97TX/G8
T9-T10-T15-T20-T25
T27-T30-T40



97TX/BG8
T9-T10-T15-T20-T25-T27-T30-T40




97TX/SC8
T9-T10-T15-T20-T25
T27-T30-T40
97TX/SCV



97TX/B13
T6-T7-T8-T9-T10-T15-T20
T25-T27-T30-T40-T45-T50
96N/BV

97BTX

ball head offset key wrenches, for Torx(R) head screws

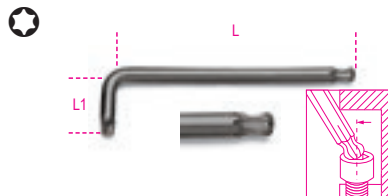

	L mm	L1 mm		
T9	62	16	5	000970109
T10	71	17	5	000970110
T15	81	18	5	000970115
T20	92	19	5	000970120
T25	94	20	5	000970125
T27	105	21	5	000970127
T30	114	24	5	000970130
T40	129	26	5	000970140
T45	133	28	5	000970145
T50	152	32	3	000970150
T55	164	35	3	000970155



97BTX/SC8
T9-T10-T15-T20-T25-T27-T30-T40
97BTX/SCV



97BTX/B8
T9-T10-T15-T20-T25
T27-T30-T40
96N/BV

97BTX-C

ball head offset key wrenches, for Torx® head screws, coloured



	L mm	L1 mm		
T9	80	16		5 000971609
T10	86	17		5 000971610
T15	90	18		5 000971615
T20	95	19		5 000971620
T25	100	20		5 000971625
T27	105	21		5 000971627
T30	114	24		5 000971630
T40	124	26		5 000971640



97BTX-C/SC8
T9-T10-T15-T20-T25-T27-T30-T40
97BTX-C/SCV



97BTXL

ball head offset key wrenches, long model, for Torx® head screws



	L mm	L1 mm		
T9	80	15	3	000970309
T10	86	17	3	000970310
T15	100	18	3	000970315
T20	110	19	3	000970320
T25	126	20	3	000970325
T27	140	24	3	000970327
T30	160	28	3	000970330
T40	176	32	3	000970340



97BTXL/SC8 T9-T10-T15-T20-T25-T27-T30-T40	1	000970364
97BTXL/SCV	1	000970982

97RTX

offset key wrenches for Tamper Resistant Torx® head screws



	L mm	L1 mm		
T6	40	15	5	000970206
T7	45	15	5	000970207
T8	50	16	5	000970208
T9	56	16	5	000970209
T10	62	17	5	000970210
T15	72	17	5	000970215
T20	83	18	5	000970220
T25	90	18	5	000970225
T27	100	20	5	000970227
T30	105	24	5	000970230
T40	112	26	5	000970240
T45	118	26	5	000970245
T50	122	28	3	000970250
T55	128	30	3	000970255




97RTX/SC8 T9-T10-T15-T20-T25-T27-T30-T40	1	000970263
97RTX/SCV	1	000970984



97RTX/B8 T9-T10-T15-T20-T25-T27-T30-T40	1	000970260
96N/BV	1	000960651

97TTX

offset key wrenches with handles for Torx® head screws

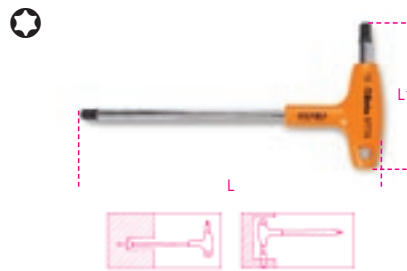

	L mm	L1 mm		
T6	130	52	3	000970706
T7	130	52	3	000970707
T8	139	52	3	000970708
T9	139	52	3	000970709
T10	179	70	3	000970710
T15	179	70	3	000970715
T20	179	70	3	000970720
T25	179	70	3	000970725
T27	200	84	3	000970727
T30	200	84	3	000970730
T40	221	103	3	000970740
T45	236	106	2	000970745
T50	255	117	2	000970750



97TTX/S6 T10-T15-T20-T25-T30-T40	1	000970791
97TTX/S8 T8-T10-T15-T20-T25-T27-T30-T40	1	000970808
97TTX/S11 T8-T9-T10-T15-T20-T25-T27-T30-T40-T45-T50	1	000970800
97TTX/S13 T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45-T50	1	000970813



97TTX/SP11 T8-T9-T10-T15-T20-T25-T27-T30-T40-T45-T50	1	000970840
96T/SPV 96T/S11	1	000960958
97TTX/S11		

98XZN

offset key wrenches with XZN® profile



DIN 65253

	L mm	L1 mm		
M5	83	25	5	000980005
M6	89	30	5	000980006
M8	97	32	5	000980008
M10	106	35	5	000980010
M12	116	37	5	000980012
M14	118	45	5	000980014
M16	125	45	5	000980016



98XZN/B5 M5-M6-M8-M10-M12	1	000980650
96N/BV	1	000960651

99

hook wrenches with square noses, for ring nuts UNI/ISO 2982, 2983



UNI 6752

	mm	A mm		
12-14	1,5	3	000990012	
16-18-20	1,8	3	000990016	
22-25-28	1,8	3	000990022	
30-32	2,1	3	000990030	
34-36-38	2,4	3	000990034	
40-42	2,4	3	000990040	
45-50	2,5	3	000990045	
52-55-58	2,5	3	000990052	
62-65	3,1	3	000990062	
68-70-75	3,1	3	000990068	
80-85-90	3,8	2	000990080	
92-95	4,3	2	000990092	
98-100	4,3	2	000990098	
105-110-115	4,4	1	000990105	
120-125-130	4,9	1	000990120	
135-145	6,0	1	000990135	
155-165	6,0	1	000990155	

99SQ

hook wrenches with square noses for ring nuts



	mm	B mm		
15-35	2,7	2	000990215	
35-50	3,5	2	000990235	
50-80	4,7	2	000990250	
80-120	6,2	2	000990280	
120-180	7,8	2	000990290	

99ST

hook wrenches with round noses for ring nuts



Ø mm	Ø mm	B mm		
15-35	3,0	2,5	2	000990315
35-50	4,0	4,5	2	000990335
50-80	5,0	5,0	2	000990350
80-120	6,0	7,0	2	000990380
120-180	8,0	9,0	2	000990390

99 VN/...

spare nose for item 99ST

	Ø mm		
99ST VN/15	15-35	1	000990295
99ST VN/35	35-50	1	000990296
99ST VN/50	50-80	1	000990297
99ST VN/80	80-120	1	000990298
99ST VN/120	120-180	1	000990299

100

round pin wrench for ring nuts with front holes



Ø mm	L mm	Ø min-max mm		
4,9-5,9	250	18-100	1	001000001
6,9-7,9				

100/KIT

spare pins for item 100




100/KIT	1	001000010

111E

ADJUSTABLE WRENCHES WITH SCALES

The new adjustable wrenches with scales, **Beta 111E**, allow differently sized nuts and bolts to be tightened and loosened through the sliding jaws, which can be adjusted through the central rolls.

Head angled at **15°**, allowing hardly accessible spaces to be reached, as is the case with our iconic combination wrenches, "42"

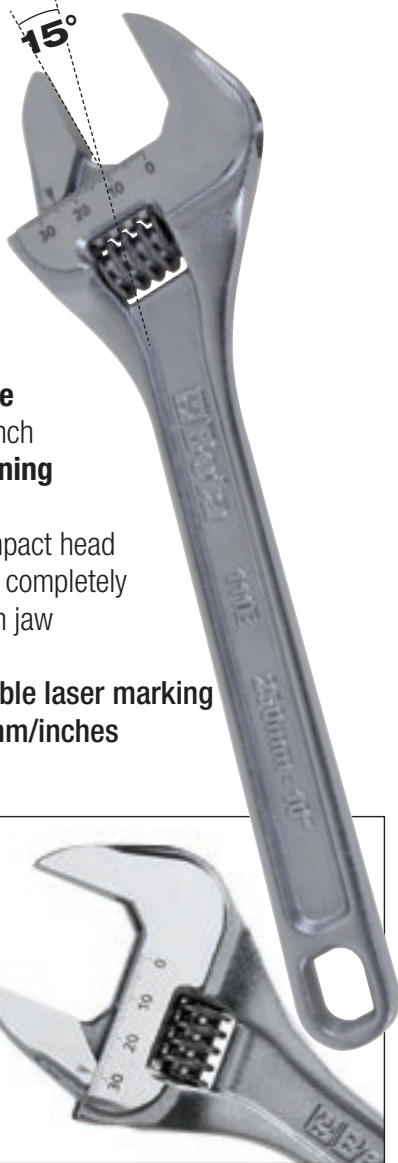

Wide wrench opening

Compact head with completely open jaw

Double laser marking in mm/inches

Based on the new ergonomic properties, weight has been reduced by 20%

Made from high-performance alloy steel for increased mechanical torsional strength

Special heat treatment for **excellent wear resistance**

Hole on handle for hanging wrench

111E

adjustable wrenches with scales, chrome-plated

- Right-hand rotation of pin
- Mm/inch scale



DIN 3117 ISO 6787

L mm	L "	A max mm		
100	4	15	3	001110110
150	6	24	3	001110115
200	8	29	3	001110120
250	10	34	3	001110125
300	12	40	3	001110130
380	15	45	3	001110138
450	18	54	2	001110145
600	24	62	1	001110160

111EN

adjustable wrenches with scales, phosphated

- Left-hand rotation of pin
- Mm/inch scale



DIN 3117 ISO 6787

L mm	L "	A max mm		
100	4	15	3	001110410
150	6	24	3	001110415
200	8	29	3	001110420
250	10	34	3	001110425
300	12	40	3	001110430
380	15	45	3	001110438
450	18	54	2	001110445

111ER

reversible jaw adjustable wrenches with scales, chrome-plated

- Reversible jaw
- Right-hand rotation of pin
- Mm/inch scale



L mm	L "	A max mm	Ø max "		
200	8	29	3/4	3	001110520
250	10	34	1	3	001110525
300	12	40	1.1/4	2	001110530

111CM

wide opening adjustable wrenches, chrome-plated, short series

- Wide opening
- Right-hand rotation
- Mm/inch scale



L mm	L "	A max mm		
170	6	32	2	001110770
220	8	38	3	001110722
270	10	46	3	001110727

Beta

730/15

adaptor

1 1/2"



L	∅			
mm	mm			
105	84,0	1.1/2	1	1 007300810



Always apply torque loads evenly and progressively to avoid breakage and any possible injury.

730/21

impact extension bar,
1.1/2" male and female square drives

1 1/2"



L	∅		
mm	mm		
250	86		1 007300822

730/25

drive impact universal joint, 1.1/2" male and female square drives

1 1/2"




L	∅		
mm	mm		
150	86		1 007300830

733/15

adaptor

2 1/2"



L	∅			
mm	mm			
156	127	2.1/2	1.1/2	1 007330810

BITS

1/4	5/16	10mm

ISO 1173-C 6,3



retainer spring seat

ISO 1173-E 6,3



retainer ball slot

851

magnetic bit holder with handle

14



L1	L		
mm	mm		
45	165	2 008510165	
125	245	2 008510245	

851SR

quick release bit holder with handle

14




L	L1		
mm	mm		
230	110	2 008510001	

852

bit holder with articulated T handle

14

10

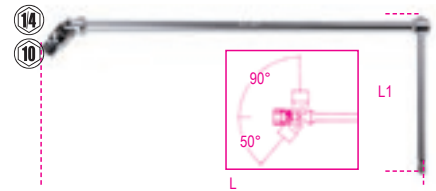

	L	L1		
	mm	mm		
1/4"	400	160	2 008520006	
10 mm	400	160	2 008520010	

855P

reversible ratchet bit holder with articulated handle, and 7 built-in bits

14



L	L1		
mm	mm		
240	100	1 008550010	

- 860PH PH1 - PH2
- 860PZ PZ1 - PZ2
- 860LP LP 0,8x5,5 mm
- 860PE 4 - 5 mm

860LP

bits for slotted head screws, coloured

14

1/4



ISO 2351-1
ISO 1173 C 6,3

SxA	L		
mm	mm		
0,5x3	25	5 008600005	
0,6x4,5	25	5 008600010	
0,8x5,5	25	5 008600015	
1x5,5	25	5 008600020	
1,2x6,5	25	5 008600025	

860PH

bits for cross head Phillips® screws, coloured

14

1/4



ISO 2351-2
ISO 1173 C 6,3

PH	L		
	mm		
0	25	5 008600220	
1	25	5 008600225	
2	25	5 008600230	
3	25	5 008600245	
4	25	5 008600250	



860PZ

bits for cross head Pozidriv® - Supadriv® screws, coloured



ISO 2351-2
ISO 1173 C 6,3

PZ	L mm	n.	008600320
1	25	5	008600320
2	25	5	008600325
3	25	5	008600330
4	25	5	008600335

860PE

hexagon bits for power drivers, coloured



ISO 2351-3
ISO 1173 C 6,3

mm	L mm	n.	008600101
2	25	5	008600101
2,5	25	5	008600102
3	25	5	008600103
4	25	5	008600104
5	25	5	008600105
6	25	5	008600106
8	25	5	008600108
10	25	5	008600110

860TX

bits for Torx® head screws, coloured



ISO 1173 C 6,3

T	L mm	n.	008600704
T6	25	5	008600704
T7	25	5	008600705
T8	25	5	008600710
T9	25	5	008600715
T10	25	5	008600720
T15	25	5	008600725
T20	25	5	008600730
T25	25	5	008600735
T27	25	5	008600740
T30	25	5	008600745
T40	25	5	008600750

860RTX

bits for Tamper Resistant Torx® head screws, coloured



ISO 1173 C 6,3

T	L mm	n.	008600550
T9	25	5	008600550
T10	25	5	008600555
T15	25	5	008600560
T20	25	5	008600565
T25	25	5	008600570
T27	25	5	008600575
T30	25	5	008600580
T40	25	5	008600585

860/55

reversible bit ratchet



L mm 100
1/4 3 008600870

860/58

bit ratchet with rotating handle

- Bit can be fitted onto both sides, for screwing or unscrewing
- Bi-material handle



L mm 126 1/4" 27 15
1 008600884

860/C27

25 bits, 1 connector and 1 reversible ratchet in plastic case



860/C27 1 008600880

860/55	100 mm
860LP	0,5x3-1,0x5,5-1,2x6,5 mm
860PH	PH1-PH2(x2)-PH3
860PZ	PZ1-PZ2(x2)-PZ3
860PE	2-2,5-3-4-5-6 mm
860TX	T6-T8-T10-T15-T20-T25-T30-T40
892/0	● 1/4 ■ 1/4

860PHZ/A10

set of 10 bits with magnetic bit holder in plastic case



860PHZ/A10 1 008600910

860PH	PH1 PH2 PH3	n. 1 3 1
860PZ	PZ1 PZ2 PZ3	1 3 1
882M1	○ 1/4 ● 1/4	1

860PE/A10

set of 10 bits with magnetic bit holder in plastic case



860PE/A10 1 008600920

860PE	2-2,5 mm	n. 1
882M1	3-4-5-6 mm ○ 1/4 ● 1/4	2

860TX/A10

set of 10 bits with magnetic bit holder in plastic case



860TX/A10 1 008600970

860TX	T7 - T8 - T9 - T10 - T15 - T20 T25 - T27 - T30 - T40	n. 1
882M1	○ 1/4 ● 1/4	

860MIX/A10

set of 10 bits with magnetic bit holder in plastic case



860MIX/A10 1 008600900

860LP	0,5x3 - 1x5,5 - 1,2x6,5 mm	n. 1
860PH	PH1 PH2 PH3	1 2 1
860PZ	PZ1 - PZ2 - PZ3	1
882M1	○ 1/4 ● 1/4	



860MIX/A31

set of 30 bits with magnetic quick release bit holder in plastic case



860MIX/A31

1 008600902

	● 860LP	0,5x3 - 0,6x4,5 - 0,8x5,5 1,0x5,5 - 1,2x6,5 mm
	○ 860PE	2 - 2,5 - 3 - 4 - 5 - 6 8 - 10 mm
	⊕ 860PH	PH0 - PH1 - PH2 - PH3 - PH4
	⊕ 860PZ	PZ1 - PZ2 - PZ3 - PZ4
	⊕ 860RTX	T9 - T10 - T15 - T20 T25 - T27 - T30 - T40
	● 882MSR 50	○ 1/4 ● 1/4

860/C38P

1 reversible ratchet bit holder with articulated handle, 27 bits, 8 hexagon sockets and 2 accessories



860/C38P

1 008600878

	● 860LP	0,6x4,5-0,8x5,5-1,0x5,5- 1,2x6,5 mm
	○ 860PE	2-2,5-3-4(x2)-5(x2) mm
	⊕ 860PH	PH1(x2)-PH2(x2)-PH3
	⊕ 860PZ	PZ1(x2)-PZ2(x2)-PZ3
	⊕ 860TX	T10-T15-T20-T25-T30-T40
	○ 900	5-5,5-6-7-8-9-10-13 mm
	● 1/4 ■ 1/4	
	● 1/4 ■ 1/4	
	● 855P	240 mm

270x120x45 mm

861LP

bits for slotted head screws



ISO 2351-1

ISO 1173 C 6,3

SxA mm	L mm		
0,5x3	25	10	008610005
0,6x4	25	10	008610007
0,6x4,5	25	10	008610010
0,8x5,5	25	10	008610015
1x5,5	25	10	008610020
1,2x6,5	25	10	008610025
1,2x8	25	10	008610028
1,6x8	25	10	008610030

861PH

bits for cross head Phillips® screws



ISO 2351-2

ISO 1173 C 6,3

PH	L mm		
0	25	10	008610200
1	25	10	008610205
2	25	10	008610210
2L	50	10	008610213
3	25	10	008610215
4	25	10	008610220

861PH/C

bits for cross head Phillips® screws



ISO 2351-2

ISO 1173 C 6,3

PH	L mm		
0	25	200	008610250
1	25	200	008610255
2	25	200	008610260
2L	50	100	008610263
3	25	200	008610265
4	25	100	008610270

861PZ

bits for cross head
Pozidriv®-Supadriv® screws



ISO 2351-2

ISO 1173 C 6,3

PZ	L mm		
1	25	10	008610300
2	25	10	008610305
2L	50	10	008610308
3	25	10	008610310
4	25	10	008610315

861PZ/C

bits for cross head
Pozidriv®-Supadriv® screws



ISO 2351-2

ISO 1173 C 6,3

PZ	L mm		
1	25	200	008610350
2	25	200	008610355
2L	50	100	008610358
3	25	200	008610360
4	25	100	008610365

861PE

hexagon bits for power drivers



ISO 2351-3

ISO 1173 C 6,3

mm	L mm		
2	25	10	008610100
2,5	25	10	008610105
3	25	10	008610110
4	25	10	008610115
5	25	10	008610120
6	25	10	008610125
8	25	10	008610130
10	25	10	008610135

861TX

bits for Torx® head screws




ISO 1173 C 6,3

	L mm		
T5	25	10	008610399
T6	25	10	008610400
T7	25	10	008610405
T8	25	10	008610410
T9	25	10	008610415
T10	25	10	008610420
T15	25	10	008610425
T20	25	10	008610430
T25	25	10	008610435
T27	25	10	008610440
T30	25	10	008610445
T40	25	10	008610450



861TX/C

bits for Torx® head screws



ISO 1173 C 6,3

	L mm		
T10	25	200	008610470
T15	25	200	008610475
T20	25	200	008610480
T25	25	200	008610485
T27	25	200	008610490
T30	25	200	008610495
T40	25	200	008610499

861RTX

bits for Tamper Resistant Torx® head screws



ISO 1173 C 6,3

	L mm		
T6	25	10	008610537
T7	25	10	008610538
T8	25	10	008610540
T9	25	10	008610500
T10	25	10	008610505
T15	25	10	008610510
T20	25	10	008610515
T25	25	10	008610520
T27	25	10	008610525
T30	25	10	008610530
T40	25	10	008610535
T45	25	10	008610539

861RIBE

bits for RIBE® screws



ISO 1173 C 6,3

	L mm		
M5	25	10	008610705
M6	25	10	008610706
M7	25	10	008610707
M8	25	10	008610708
M9	25	10	008610709

861TRW

bits for Tri-Wing® head screws



ISO 1173 C 6,3

	L mm		
GR 1	25	10	008610601
2	25	10	008610602
3	25	10	008610603
4	25	10	008610604
5	25	10	008610605
6	25	10	008610606

861TQS

bits for Torq-Set® head screws



ISO 1173 C 6,3

	L mm		
GR 0	25	10	008610620
1	25	10	008610621
2	25	10	008610622
3	25	10	008610623
4	25	10	008610624
5	25	10	008610625
6	25	10	008610626
8	25	10	008610628
10	25	10	008610630

861SP

bits for Spanner screws



ISO 1173 C 6,3

	D mm	L mm		
SP 4	1,5	25	10	008610650
6	2,4	25	10	008610653
8	2,8	25	10	008610656
10	3,3	25	10	008610658
12	3,9	25	10	008610660

1483KV-PT/S7



1483KV PT/S7

188

861XZN

bits for XZN® screws



ISO 1173 C 6,3

	L mm		
M5	25	10	008610725
M6	25	10	008610726
M8	25	10	008610728

861/C61P

61 bits and 1 magnetic quick release bit holder



861/C61P

1 008610978

	● 861LP	0,5x3 - 0,6x4,5 - 0,8x5,5 - 1,0x5,5 1,2x6,5 - 1,2x8 - 1,6x8 mm
	○ 861PE	2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm
	⊕ 861PH	PH0 - PH1 - PH2 - PH3
	⊕ 861PZ	PZ1 - PZ2 - PZ3
	⊕ 861TX	T6 - T7 - T8 - T9 - T10 - T15 T20 - T25 - T27 - T30 - T40
	⊕ 861RTX	T9 - T10 - T15 - T20 - T25 T27 - T30 - T40
	⊕ 861TRW	1 - 2 - 3 - 4 - 5 - 6
	⊕ 861TQS	0 - 1 - 2 - 3 - 4 - 5 - 6 - 8 - 10
	⊕ 861SP	4 - 6 - 8 - 10 - 12
	⊕ 851SR	○ 1/4"

270x120x45 mm - 975 g

862LP

bits for slotted head screws



ISO 2351-1

ISO 1173 E 6,3

SxA mm	L mm		
0,5x3	50	5	008620005
0,6x4,5	50	5	008620010
0,8x5,5	50	5	008620015
1x5,5	50	5	008620020
1,2x6,5	50	5	008620025
1,2x8	50	5	008620030
1,6x8	50	5	008620035

862PH

bits for cross head Phillips® screws



ISO 2351-2

ISO 1173 E 6,3

PH	L mm		
1	50	5	008620200
2	50	5	008620205
3	50	5	008620210



862PH/L

bits for cross head Phillips® screws



ISO 2351-2

ISO 1173 E 6,3

PH	L mm	
1	70	5 008620230
2	70	5 008620232
3	70	5 008620234

862PH-XL

bits for cross head Phillips® screws



ISO 2351-2/ISO 1173 E 6,3

PH	L mm	
1	100	5 008620250
2	100	5 008620252
3	100	5 008620254

862PZ

bits for cross head Pozidriv®-Supadriv® screws



ISO 2351-2

ISO 1173 E 6,3

PZ	L mm	
1	50	5 008620300
2	50	5 008620305
3	50	5 008620310

862PE

hexagon bits for power drivers



ISO 2351-3

ISO 1173 E 6,3

mm	L mm	
3	50	5 008620103
4	50	5 008620104
5	50	5 008620105
6	50	5 008620106
8	50	5 008620108

862TX

bits for Torx® head screws



ISO 1173 E 6,3

	L mm	
T6	50	5 008620506
T7	50	5 008620507
T8	50	5 008620508
T9	50	5 008620509
T10	50	5 008620510
T15	50	5 008620515
T20	50	5 008620520
T25	50	5 008620525
T27	50	5 008620527
T30	50	5 008620530
T40	50	5 008620540

862TX/L

bits for Torx® head screws



ISO 1173 E 6,3

	L mm	
T6	70	5 008620556
T7	70	5 008620557
T8	70	5 008620558
T9	70	5 008620559
T10	70	5 008620560
T15	70	5 008620565
T20	70	5 008620570
T25	70	5 008620575
T27	70	5 008620577
T30	70	5 008620580
T40	70	5 008620590

862TX-XL

bits for Torx® head screws



ISO 1173 E 6,3

	L mm	
T9	100	5 008620659
T10	100	5 008620660
T15	100	5 008620665
T20	100	5 008620670
T25	100	5 008620675
T27	100	5 008620677
T30	100	5 008620680
T40	100	5 008620690

862F

magnetic bits, hexagon sockets



ISO 1173 E 6,3

mm	L mm	Ø mm	
5,5	65	11	5 008620405
6	65	11	5 008620406
7	65	11	5 008620407
8	65	13	5 008620408
10	65	15	5 008620410
12	65	18	5 008620412
13	65	18	5 008620413

862F/A7

7 magnetic bits, hexagon sockets, in plastic case



862F/A7

1 008620950



862F 5,5-6-7-8-10-12-13 mm

866LP

bits for slotted head screws



ISO 2351-1
ISO 1173 C 8

SxA mm	L mm	
1x5,5	41	10 008660005
1,2x6,5	41	10 008660010
1,6x8	41	10 008660015
1,6x10	41	10 008660020
2x12	41	10 008660025

866PH

bits for cross head Phillips® screws



ISO 2351-2

ISO 1173 C 8

PH	L mm	
1	32	10 008660200
2	32	10 008660205
3	32	10 008660210
4	38	10 008660215

866PZ

bits for cross head Pozidriv®-Supadriv® screws



ISO 2351-2

ISO 1173 C 8

PZ	L mm	
1	32	10 008660300
2	32	10 008660305
3	32	10 008660310
4	38	10 008660315

866PE

hexagon bits for power drivers



ISO 2351-3

ISO 1173 C 8

mm	L mm		
3	30	10	008660100
4	30	10	008660105
5	30	10	008660110
6	30	10	008660115
7	30	10	008660117
8	30	10	008660120
10	30	10	008660125
12	30	10	008660132
14	30	10	008660134

866TX

bits for Torx® head screws



ISO 1173 C 8

	L mm		
T20	30	10	008660400
T25	30	10	008660405
T27	30	10	008660410
T30	30	10	008660415
T40	30	10	008660420
T45	30	10	008660425
T50	30	10	008660430
T55	30	10	008660435
T60	30	10	008660440
T70	30	10	008660445

866RTX

bits for Tamper Resistant Torx® head screws



ISO 1173 C 8

	L mm		
T40	30	10	008660520
T45	30	10	008660525
T50	30	10	008660530
T55	30	10	008660535
T60	30	10	008660540
T70	30	10	008660545

867PE

hexagon bits



mm	L mm		
4	30	5	008670104
5	30	5	008670105
6	30	5	008670106
7	30	5	008670107
8	30	5	008670108
10	30	5	008670110
12	30	5	008670112

867PE/L

hexagon bits



mm	L mm		
4	75	5	008670154
5	75	5	008670155
6	75	5	008670156
7	75	5	008670157
8	75	5	008670158
10	75	5	008670160
12	75	5	008670162

867XZN

bits with XZN® profile



	L mm		
M4	30	5	008670204
M5	30	5	008670205
M6	30	5	008670206
M8	30	5	008670208
M10	30	5	008670210
M12	30	5	008670212

867XZN/L

bits with XZN® profile



	L mm		
M5	75	5	008670255
M6	75	5	008670256
M8	75	5	008670258
M10	75	5	008670260
M12	75	5	008670262

867TX

bits for Torx® head screws



	L mm		
T20	30	5	008670400
T25	30	5	008670405
T30	30	5	008670410
T40	30	5	008670415
T45	30	5	008670420
T50	30	5	008670425
T55	30	5	008670430

867TX/L


bits for Torx® head screws



	L mm		
T20	75	5	008670450
T25	75	5	008670455
T30	75	5	008670460
T40	75	5	008670465
T45	75	5	008670470
T50	75	5	008670475
T55	75	5	008670480

867RTX

bits for Tamper Resistant Torx® head screws



	L mm		
T20	30	5	008670500
T25	30	5	008670505
T30	30	5	008670510
T40	30	5	008670515
T45	30	5	008670520
T50	30	5	008670525
T55	30	5	008670530

867RTX/L


bits for Tamper Resistant Torx® head screws



	L mm		
T20	75	5	008670550
T25	75	5	008670555
T30	75	5	008670560
T40	75	5	008670565
T45	75	5	008670570
T50	75	5	008670575
T55	75	5	008670580

867RIBE

bits for RIBE® screws



	L mm		
M5	30	5	008670705
M6	30	5	008670706
M7	30	5	008670707
M8	30	5	008670708
M9	30	5	008670709
M10	30	5	008670710
M11	30	5	008670711
M12	30	5	008670712
M13	30	5	008670713

867/RIBE/L

bits for RIBE® screws



	L		
	mm		
M5	75	5	008670755
M6	75	5	008670756
M7	75	5	008670757
M8	75	5	008670758
M9	75	5	008670759
M10	75	5	008670760
M11	75	5	008670761
M12	75	5	008670762
M13	75	5	008670763

867/...

bit holder sockets for item 867



	mm	□	L	Ø	
	mm	mm	mm	mm	
867/1	10	3/8"	38	17	5 008670600
867/2	10	1/2"	38	22	5 008670601

867/C20

18 bits for RIBE® screws, with 10 mm hexagon drive and 2 accessories



867/C20 1 008670920

867/RIBE	5-6-7-8-9-10-11-12-13 mm
867/RIBE/L	5-6-7-8-9-10-11-12-13 mm
867/1	
867/2	

335x145x60 mm - 1,7 kg

867/C38

38 hexagon bits, 10 mm, 1 bit holder with articulated T handle



867/C38 1 008670938

852	10 mm
867PE	4-5-6-7-8-10-12mm
867PE/L	4-5-6-7-8-10-12mm
867XZN	M5-M6-M8-M10-M12
867XZN/L	M5-M6-M8-M10-M12
867TX	T20-T25-T30-T40-T45-T50-T55
867TX/L	T20-T25-T30-T40-T45-T50-T55
882	

420x185x60 mm - 3 kg

867/C52

52 hexagon bits, 10 mm and 2 accessories



867/C52 1 008670901

867PE	4-5-6-7-8-10-12 mm
867PE/L	4-5-6-7-8-10-12 mm
867XZN	M5-M6-M8-M10-M12
867XZN/L	M5-M6-M8-M10-M12
867TX	T20-T25-T30-T40-T45-T50-T55
867TX/L	T20-T25-T30-T40-T45-T50-T55
867RTX	T20-T25-T30-T40-T45-T50-T55
867RTX/L	T20-T25-T30-T40-T45-T50-T55
867/1	○ 10 mm - □ 3/8"
867/2	○ 10 mm - □ 1/2"

250x170x70 mm - 2,1 kg

852



852 78,116

882

bit holder with retaining ring for drivers



ISO 1173 E 6,3

L	○	●	Ø	
mm	mm	mm	mm	
57	1/4	1/4	11	5 008820001

882AN

bevel gearbox, 1/4" hexagon drive

- For electric drills with 10 mm and 13 mm spindles and 1/4" impact wrenches
- Max. speed: 3600 rpm
- Max. torque: 30 Nm
- With quick change bit holder
- Gear ratio: 1:1
- Connection to tool through 1/4" hexagon D6.3




ISO 1173 E 6,3
ISO 1173 C 6,3

L	○	●	
mm	mm	mm	
137	1/4	1/4	1 008820090

882M1

magnetic bit holder



ISO 1173 E 6,3

L	○	●	Ø	
mm	mm	mm	mm	
50	1/4	1/4	11	5 008820006

882M

magnetic bit holder



ISO 1173 E 6,3

L	○	●	Ø	
mm	mm	mm	mm	
75	1/4	1/4	11	5 008820005



882MSR

magnetic quick release bit holder for drivers



ISO 1173 E 6,3

L mm	○	●	∅ mm		
50	1/4	1/4	11	5	008820205
75	1/4	1/4	11	5	008820207

882P

magnetic bit holder extension bar



L mm	●	○	∅ mm		
80	1/4	1/4	10	5	008820080

892

adaptors for drivers



	■	●	L mm		
892/0	1/4	1/4	25	5	008920000
* 892/1	1/4	5,5	50	5	008920001
* 892/2	3/8	5,5	50	5	008920002
° 892/3	1/4	1/4	50	5	008920003
° 892/4	3/8	1/4	50	5	008920004
892/5	1/4	5/16	75	5	008920005
892/6	3/8	5/16	75	5	008920006
892/7	1/2	1/4	75	5	008920007

* ISO 1173 A 5,5
° ISO 1173 C 6,3



Beta

895

socket holder for bits
item 861 - 862 - 866



DIN 7427

	○	□	L mm	∅ mm		
895/1	1/4	1/4	25,4	12	5	008950000
895/3	1/4	3/8	29	16,8	5	008950001
895/4	5/16	3/8	29	16,8	5	008950002
895/5	1/4	1/2	38	22	5	008950005
895/6	5/16	1/2	38	22	5	008950003

897

flexible bit holder with handle



L mm	L1 mm		
280	154	2	008970010

897L

flexible bit holder with handle, long model



L mm	L1 mm		
500	380	2	008970015

RATCHETS 9XX/55

Compact head



Operates in small spaces, at an angle of no more than 5°, thanks to the 72-tooth ring gear

Prevents slipping or releasing under tension

- Pressing of hand on ratchet head does not cause reversal and always allows free lever return
- One-handed reversal
- Outstanding mechanical characteristics



Reduced work load, 17 teeth in contact with gear at all times

951 T-HANDLE WRENCHES WITH THREE HEXAGON MALE ENDS



When this wrench was launched, back in 1980, it was a revolution. Designed to work on high-resistance screws, it is the name for quick handling, accurate fit and flexible use.

The hexagon T handle can be adjusted as required.

The hexagon ends are designed to transmit the maximum possible torque to the screw.


The rod length allows remarkable torques to be effortlessly applied to the screws.

Ongoing production improvements have translated, for example, into sandblasted finishes and sharp-edged hexagon ends which allow a better fit onto any screws, including damaged ones.


Laser marking results in a sturdier rod.

951

T-handle wrenches with three hexagon male ends

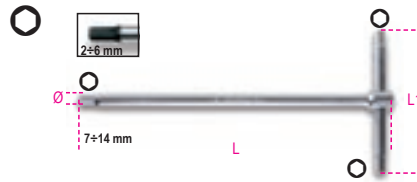

mm	L mm	L1 mm	Ø mm	Hand	Part No.
2	125	63	4,0	5	009510521
2,5	150	63	4,0	5	009510525
3	150	63	4,0	5	009510530
3,5	175	76	5,5	5	009510535
4	175	76	5,5	5	009510540
4,5	195	87	6,5	5	009510545
5	195	87	6,5	5	009510550
6	215	99	8,0	5	009510560
7	230	109	9,0	5	009510570
8	250	122	10,0	5	009510580
9	265	132	11,0	5	009510590
10	280	142	12,0	5	009510610
12	305	160	15,0	3	009510620
14	330	178	17,0	3	009510640



Model	Hand	Part No.
951/S6 2,5-3-4-5-6-8 mm	1	009510687
951/S8 2-2,5-3-3,5-4-4,5-5-6 mm	1	009510693
951/S14 2-2,5-3-3,5-4-4,5-5-6-7-8-9-10-12-14 mm	1	009510695




Model	Hand	Part No.
951/SP6 3-4-5-6-8-10 mm	1	009510696
951/SPV	1	009510697




951AS

T-handle wrenches with three hexagon male ends

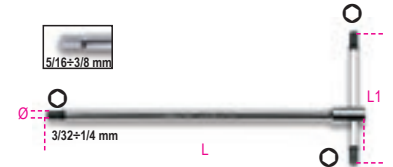

"	L mm	L1 mm	Ø mm	Hand	Part No.
3/32	125	63	4,0	2	009510750
7/64	150	63	4,0	2	009510751
1/8	150	63	4,0	2	009510752
9/64	175	76	5,5	2	009510753
5/32	175	76	5,5	2	009510754
3/16	195	86	6,5	2	009510755
7/32	215	99	8,0	2	009510757
1/4	230	109	9,0	2	009510758
5/16	250	122	10,0	2	009510759
3/8	280	142	12,0	2	009510760




Model	Hand	Part No.
951AS/S6X 1/8-3/16-7/32-1/4-5/16-3/8	1	009510771

951TX

T-handle wrenches with three male ends for Torx® head screws




Model	L mm	L1 mm	Ø mm	Hand	Part No.
T6	125	63	4	3	009510806
T7	125	63	4	3	009510807
T8	125	63	4	3	009510808
T9	125	63	4	3	009510809
T10	150	63	4	3	009510810
T15	150	63	4	3	009510815
T20	175	76	5	3	009510820
T25	175	76	5	3	009510825
T27	195	87	6	3	009510827
T30	195	87	6	3	009510830
T40	215	99	7	3	009510840
T45	230	109	8	3	009510845
T50	250	122	9	3	009510850



Model	Hand	Part No.
951TX/S6 T8-T10-T15-T20-T25-T30	1	009510866
951TX/S13 T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45-T50	1	009510863

952 T-HANDLE WRENCHES WITH SWIVELLING HEXAGON SOCKETS



Reliable, precise pre-positioning is the secret for the success of this wrench.

The articulated joint maintains its function over the years, no adjustment being required.


Socket rotation angle: 60°. Can be used at 90° in fixed position.

Sliding T-handle, can be stopped in the required position throughout its length.

Triple size marking on head.

952

T-handle wrenches with swivelling hexagon sockets

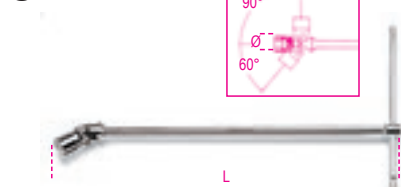

UNI 6743

mm	Ø mm	L mm	Hand	Part No.
6	9,5	395	5	009520006
7	10,7	395	5	009520007
8	12,1	395	5	009520008
9	13,2	395	5	009520009
10	14,6	400	5	009520010
11	15,8	400	5	009520011
12	17,0	400	5	009520012
13	18,7	432	5	009520013
14	19,7	432	5	009520014
15	20,9	450	3	009520015
16	22,0	450	3	009520016
17	23,4	450	3	009520017
18	24,7	450	3	009520018
19	26,0	500	3	009520019
20	27,4	500	3	009520020
21	28,5	500	3	009520021
22	29,7	500	3	009520022
24	32,4	500	3	009520024



952/S7 8-10-11-13-14-17-19 mm	1	009520074
952/S10 7-8-10-11-12-13-14-15-17-19 mm	1	009520080
952/S18 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-24 mm	1	009520083

852




852

78,84



952AS


T-handle wrenches with swivelling hexagon sockets

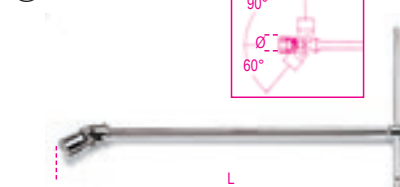

"	Ø mm	L mm	Hand	Part No.
1/4	9,5	395	2	009520256
5/16	12,1	395	2	009520258
3/8	14,6	400	2	009520260
7/16	15,8	400	2	009520261
1/2	18,7	432	2	009520263
9/16	19,7	432	2	009520264
5/8	22,0	450	2	009520266
11/16	23,4	450	2	009520267
3/4	26,0	500	2	009520269

952L

T-handle wrenches with swivelling hexagon sockets, long series

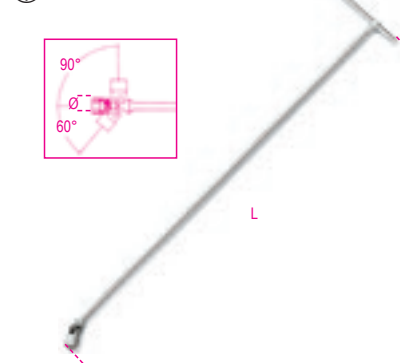

mm	Ø mm	L mm	Hand	Part No.
10	14,6	930	1	009520410
12	17,0	1063	1	009520412
13	18,7	1100	1	009520413
14	19,7	1100	1	009520414
15	20,9	1100	1	009520415
16	22,0	1100	1	009520416
17	23,4	1100	1	009520417
18	24,7	1100	1	009520418
19	26,0	1100	1	009520419

952FTX

T-handle wrenches with swivelling socket, for Torx® head screws



Ø mm	L mm	Hand	Part No.	
E6	8	392	2	009520106
E7	9	392	2	009520107
E8	10	395	2	009520108
E10	13	400	2	009520110
E12	15	440	2	009520112
E14	17	490	2	009520114
E16	19	490	2	009520116
E18	21	490	2	009520118
E20	23	490	2	009520120




952FTX/S9
E6-E7-E8-E10-E12
E14-E16-E18-E20

1 009520141

953

T-handle wrenches with swivelling hexagon male ends

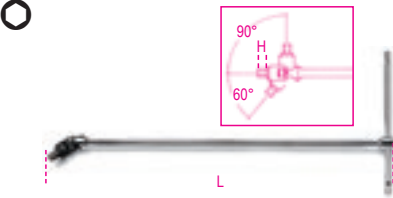

UNI 6754

mm	H mm	L mm	
3	5	395	5 009530130
3,5	6	395	3 009530135
4	6	395	5 009530140
4,5	7	395	3 009530145
5	7	395	5 009530150
6	9	400	5 009530160
7	10	425	3 009530170
8	11	425	5 009530180
10	13	440	5 009530200




953/S5
3-4-5-6-8 mm
953/S9
3-3,5-4-4,5
5-6-7-8-10 mm

1 009530305

1 009530301

953TX

T-handle wrenches with swivelling end for Torx® head screws

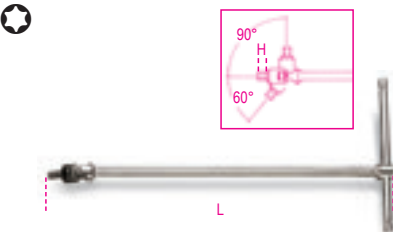

	H mm	L mm	
T20	11	396	2 009530020
T25	11	396	2 009530025
T27	11	396	2 009530027
T30	13	400	2 009530030
T40	13	400	2 009530040
T45	13	426	2 009530045
T50	14	442	2 009530050
T55	14	442	2 009530055



953TX/S8
T20-T25-T27-T30
T40-T45-T50-T55

1 009530060

VEHICLE REPAIR

Our vehicle repair tools, which are used by the most demanding professionals, are developed and manufactured to meet the world's highest standards, and regularly tested under the most stressful operating conditions.

For over 50 years, we have been proudly working hand in hand with the greatest champions, who help us improve our products non-stop and provide testimony to the highest quality standard.

The vehicle repair tools are found in these sections:

Diagnostics

items 1438 to 1499
items 1758VT to 1760TMC

Engine

items 955 to 989A
items 1438 to 1499

Oil and filters

items 1438 to 1499
items 1877 to 1885

Electric system

items 1438 to 1499

Starters

items 1498BC/12 to 1498/40A

Transmission

items 1438 to 1499

Suspension

items 1549 to 1569CP

Brakes

items 1438 to 1499

Wheels

items 955 to 989A

Body work

items 1302 to 1369
items 1763 to 1767A

Other equipment

items 1878 to 3067


Jacks

items 3029/2T to 3067/70-13T



955

tubular spark-plug wrench
chrome-plated, hexagon end



mm -"	D mm	L mm	
16	21	86	3 009550016
5/8			
20,8	29	86	3 009550021
13/16			

956C

1/2" square drive spark plug sockets
chrome-plated, hexagon ends



ISO 11168

mm -"	Ø mm	L mm	
14	18,8	70	3 009560008
9/16			
16	21,4	70	3 009560010
5/8			
17,8	23,6	70	3 009560011
11/16			
20,8	27,0	70	3 009560012
13/16			

956E

3/8" square drive spark plug sockets
chrome-plated, hexagon ends



ISO 11168

mm -"	Ø mm	L mm	
14	18,8	70	3 009560018
9/16			
16	21,4	70	3 009560020
5/8			
17,8	23,6	70	3 009560021
11/16			
20,8	27,0	70	3 009560022
13/16			

956F

3/8" square drive spark plug sockets



mm -"	Ø mm	L mm	
14	18,8	70	1 009560114
9/16			
16	20,5	70	1 009560116
5/8			

Beta **EVOLX**

THE EVOLUTION OF THE SCREWDRIVER!

The ergonomic design fits the palm of the hand perfectly. The large contact surface makes it possible to transmit maximum force with minimum effort.

Beta's tried-and-tested blades ensure unique elasticity, hardness and wear resistance, for top-end professional tools.

The octagonal section prevents any bothersome rolling on the worktop.

The precision area allows the screwdriver to be quickly rotated between the fingers.

The hole on the handle allows the screwdriver to hang for easy storage.

New thermoplastic rubber makes each use including heavy-duty ones even more comfortable.

The style and size of the tip is printed on the round cap for quick identification.

● Beta's tried-and-tested blades ensure unique elasticity, hardness and wear resistance, for top end professional tools.

● The ergonomic design fits the palm of the hand perfectly. The large contact surface makes it possible to transmit maximum force with minimum effort.

● The octagonal section prevents any bothersome rolling on the worktop.

● New thermoplastic rubber makes each use including heavy-duty ones even more comfortable.

● The brand-new hole on the handle allows the screwdriver to hang for easy storage.



● The style and size of the tip is printed on the round cap for quick identification.

● The precision area allows the screwdriver to be quickly rotated between the fingers.



1201E

screwdriver for slotted head screws



ISO 2380

SxAxL mm	L1 mm	Ø mm		
0,4x2,5x50	146	2,5	5	012011003
0,4x2,5x75	166	2,5	5	012011006
0,5x3x75	171	3,0	5	012011009
0,5x3x100	196	3,0	5	012011012
0,6x3,5x75	171	3,5	5	012011018
0,6x3,5x100	196	3,5	5	012011021
0,8x4x100	196	4,0	5	012011030
0,8x4x125	221	4,0	5	012011033
0,8x4x150	246	4,0	5	012011036
1,0x5,5x100	209	5,0	5	012011039
1,0x5,5x125	234	5,0	5	012011040
1,0x5,5x150	259	5,0	5	012011042
1,2x6,5x100	220	6,0	5	012011048
1,2x6,5x125	234	6,0	5	012011050
1,2x6,5x150	270	6,0	5	012011051
1,2x8x150	282	8,0	3	012011057
1,2x8x200	332	8,0	3	012011060
1,6x10x200	332	9,5	3	012011066



1201E/S6

0,5x3x75-0,6x3,5x100
0,8x4x100-1,0x5,5x100
1,2x8x150-1,6x10x200 mm

1 012011206

1201EN

screwdriver for slotted head screws, extra-short series



ISO 2380

SxAxL mm	L1 mm	Ø mm		
0,8x4x30	86,5	4	3	012011103
1,2x6,5x30	86,5	6	3	012011106

1201E/DZ

screwdriver for Dzus® head screws



L
mm 53

L1
mm 173

2 012011501

1202E

screwdriver for cross head Phillips® screws



UNI-ISO 8764

PHxDxL mm	L1 mm		
0x3x60	156	5	012021003
0x3x100	200	5	012021006
1x4,5x80	189	5	012021009
1x4,5x120	229	5	012021012
2x6x100	220	5	012021018
2x6x150	270	5	012021021
3x8x150	282	3	012021024
4x9,5x200	332	3	012021027



1202E/S4	1	012021204
PH0x3x60-PH1x4,5x120 PH2x6x150-PH3x8x150 mm		

1202EN

screwdriver for cross head Phillips® screws, extra-short series



UNI-ISO 8764

PHxDxL mm	L1 mm		
1x4,5x30	86,5	3	012021103
2x6x30	86,5	3	012021106

1202EL

screwdriver for cross head Phillips® screws, long series



UNI-ISO 8764-1

PHxDxL mm	L1 mm		
0x3x300	400	3	012021303
1x4,5x300	400	3	012021305
1x4,5x400	508	3	012021306
2x6x400	519	3	012021309

1203E/D

set of screwdrivers



1203E/D5	1	012031001
1201E	0,6x3,5x100-1,0x5,5x150 1,2x6,5x150 mm	
1202E	PH1x4,5x80-PH2x6x100 mm	

1203E/D5PZ	1	012031003
1201E	0,5x3x75-0,8x4x125 1,0x5,5x150 mm	
1209E/PZ	PZ1x4,5x80-PZ2x6x100 mm	

1203E/D6	1	012031006
1202E	PH1x4,5x80-PH2x6x100 mm	
1204E	0,4x2,5x60-0,5x3x100 0,8x4x100-1,0x5x125 mm	

1203E/D7	1	012031007
1201E	0,5x3x75-0,8x4x100 1,0x5,5x100-1,2x6,5x150 mm	
1202E	PH0x3x60-PH1x4,5x80 PH2x6x100 mm	

1203E/D8	1	012031008
1201E	0,5x3x75-0,8x4x125 1,0x5,5x150-1,2x6,5x150 mm	
1202E	PH0x3x60-PH1x4,5x80 PH2x6x100-PH3x8x150 mm	

1203E/D8P	1	012031018
1201E	2,5x50-3x75-4x100-5,5x100- 6,5x150 mm	
1202E	PH0x60-PH1x80-PH2x100 mm	

1203E/D10	1	012031010
1201E	0,4x2,5x50-0,5x3x75 0,8x4x100-1,0x5,5x100 1,2x6,5x150-1,2x8x150 mm	
1202E	PH0x3x60-PH1x4,5x80 PH2x6x100-PH3x8x150 mm	

1203E/D10N	1	012031019
1201E	0,4x2,5x50-0,5x3x75-0,8x4x100- 1,0x5,5x150-1,2x6,5x150 mm	
1201EN	0,8x4x30 mm	
1202E	PH0x3x60-PH1x4,5x80- PH2x6x100 mm	
1202EN	PH1x4,5x30 mm	



1203E/S

Beta evorx



1203E/S8	1	012031009
1201E	2,5x50-3x75-4x100-5,5x125- 6,5x150 mm	
1202E	PH0x3x60-PH1x4,5x80- PH2x6x100 mm	

1203E/S10	1	012031021
1201E	0,4x2,5x50-0,5x3x75 0,8x4x125-1,0x5,5x150 1,2x6,5x150-1,2x8x150 mm	
1202E	PH0x3x60-PH1x4,5x80 PH2x6x100-PH3x8x150 mm	

1204E

screwdriver for headless slotted screws



ISO 2380


SxDxL mm	L1 mm		
0,4x2,5x60	156	5	012041003
0,6x3x75	175	5	012041006
0,5x3x100	196	5	012041009
0,8x4x100	196	5	012041012
0,8x4x125	233	5	012041015
1x5x125	234	5	012041018
1x5x150	258	5	012041021
1,2x6,5x150	270	5	012041024



1204E/S5	1	012041205
0,4x2,5x60-0,5x3x100 0,8x4x100-1x5x125 1,2x6,5x150 mm		

1204EL

screwdriver for headless slotted screws, long series

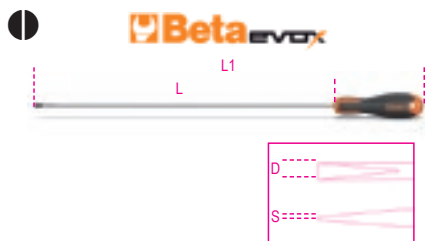

ISO 2380

SxDxL mm	L1 mm		
0,5x2,5x200	300	3	012041303
0,5x3x300	400	3	012041306
0,8x4x400	508	3	012041309
1x5x400	508	3	012041315
1,2x6,5x400	519	3	012041318

1205E/ES

hexagon drivers with handles



mm	L mm	L1 mm		
1,5	100	200	3	012051315
2	100	200	3	012051320
2,5	100	200	3	012051325
3	100	200	3	012051330
4	100	208	3	012051340
5	100	219	3	012051350
6	125	244	3	012051360
8	150	277	2	012051380



1205E/ES-S8	1	012051408
1,5-2-2,5-3-4-5-6-8 mm		

1206E/BP

ball head hexagon drivers with handles



mm	L mm	L1 mm	Ø mm		
2	100	198	2,5	3	012061320
2,5	100	198	3,0	3	012061325
3	100	198	3,5	3	012061330
4	100	209	5,0	3	012061340
5	100	220	6,0	3	012061350
6	125	245	7,0	3	012061360
8	150	287	9,5	2	012061380



1206E/BP-S7	1	012061407
2-2,5-3-4-5-6-8 mm		

1207E/TX

screwdrivers for Torx® head screws, with handles



	L mm	L1 mm	Ø mm		
T5	50	150	3	5	012071005
T6	60	156	4	5	012071006
T7	60	156	4	5	012071007
T8	60	156	4	5	012071008
T9	60	156	4	5	012071009
T10	80	189	5	5	012071010
T15	80	189	5	5	012071015
T20	100	209	5	5	012071020
T25	100	209	5	5	012071025
T27	100	220	6	5	012071027
T30	100	220	6	5	012071030
T40	130	262	7	2	012071040
T45	130	262	8	2	012071045



1207E/TX-D7	1	012071207
T6-T8-T10-T15		
T20-T25-T30		
1207E/TX-D13	1	012071213
T5-T6-T7-T8-T9-T10-T15		
T20-T25-T27-T30-T40-T45		

1208E/RTX

screwdrivers for Tamper Resistant Torx® head screws, with handles



	L mm	L1 mm	Ø mm		
T9	60	156	4	5	012081009
T10	80	189	5	5	012081010
T15	80	189	5	5	012081015
T20	100	209	5	5	012081020
T25	100	209	5	5	012081025
T27	100	220	6	5	012081027
T30	100	220	6	5	012081030
T40	130	262	7	2	012081040



1208E/RTX-D7	1	012081207
T9-T10-T15-T20		
T25-T27-T30		

1209E/PZ

screwdriver for cross head Pozidriv®-Supadriv® screws



UNI-ISO 8764

PZ	L mm	L1 mm		
0	60	156	5	012091000
1	80	189	5	012091003
2	100	220	5	012091006
3	150	282	3	012091009
4	200	327	3	012091012



1209E/PZ-S4	1	012091204
PZ0-PZ1-PZ2-PZ3		

1209EN/PZ

screwdriver for cross head Pozidriv®-Supadriv® screws, extra-short series




ISO 8764

PZ	L mm	L1 mm		
1	30	87	3	012091103
2	30	87	3	012091106



1229LP

micro-screwdrivers
for headless slotted screws

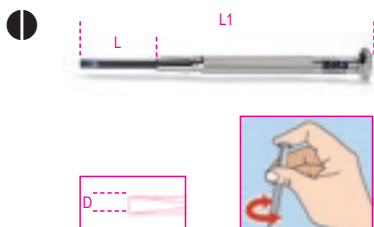


D mm	L mm	L1 mm		
1,0	17	75	5	012290210
1,2	21	85	5	012290212
1,4	21	89	5	012290214
1,8	23	94	5	012290218
2,0	23	98	5	012290220
2,4	26	103	5	012290224
3,0	28	108	5	012290230



1229LP/A6 1 012290300
1,2-1,4-1,8-2,2,4-3 mm

1229PH

micro-screwdrivers for cross head
Phillips® screws

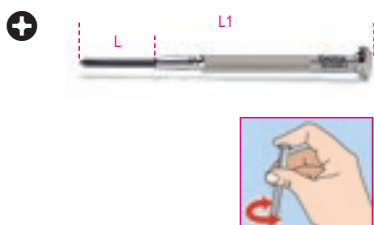

PH	L mm	L1 mm		
0	26	102	5	012290250
1	29	107	5	012290251

1229LPH/A6


set of 6 micro-screwdrivers
items 1229LP-1229PH



1229LPH/A6 1 012290310
1229LP 1,4-2,0-2,4-3 mm
1229PH PH0-PH1

1236B

offset screwdrivers
for slotted head screws

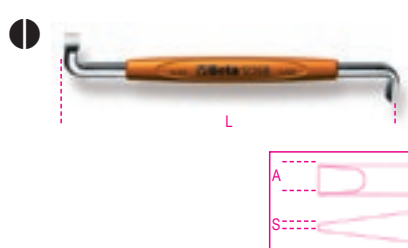

UNI 7079 DIN 5200

SxA mm	L mm		
0,8x4	100	5	012360201
1x5,5	125	5	012360202
1,2x8	150	5	012360204

1238B

offset screwdrivers
for cross head Phillips® screws




UNI 7083 DIN 5208

PH	L mm		
1-2	125	5	012380201
3-4	200	5	012380203

1241

screwdrivers with steel head for slotted head
screws

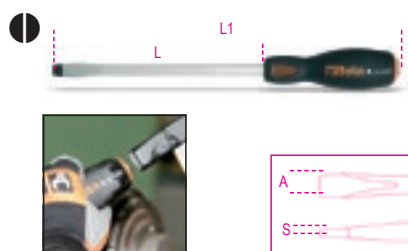


ISO 2380

SxAxL mm	L1 mm		
1x5,5x100	202	5	012410039
1,2x6,5x125	240	5	012410050
1,2x8x150	268	3	012410057
1,6x10x175	300	2	012410065
1,6x10x200	325	2	012410066
2,0x12x200	325	2	012410067
2,5x14x250	375	2	012410076



1242

screwdrivers with steel head for cross head
Phillips® screws

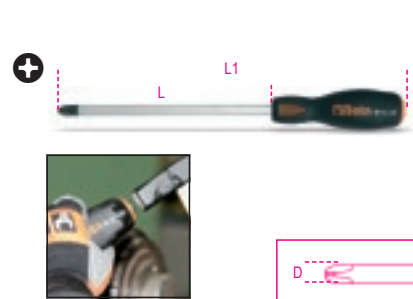

UNI/ISO 8764

PHxDxL mm	L1 mm		
1x4,5x100	202	5	012420209
2x6x100	215	5	012420218
3x8x150	268	3	012420221
4x11x200	325	2	012420224

1243LP/D6

set of 6 screwdrivers with steel heads, for
slotted head screws



1243LP/D6 1 012430016
1241 1x5,5x100-1,2x6,5x125-
3x8x150-1,6x10x175-
2,0x12x200-2,5x14x250 mm

1243/D7

Set of 7 screwdrivers with steel heads



1243/D7 1 012430017
1241 1x5,5x100-1,2x6,5x125
1,2x8x150-1,6x10x200 mm
1242 PH1x4,5x100-PH2x6x100
PH3x8x150 mm

1243/S11

set of 6 screwdrivers with steel heads



1243/S11 1 012430021

1241 1x5,5x100-1,2x6,5x125-3x8x150-
1,6x10x175-1,6x10x200-2,0x12x200-
2,5x14x250 mm
1242 PH1x4,5x100-PH2x6x100-PH3x8x150-
PH4x11x200 mm

1250

screwholding screwdrivers
for slotted head screws



SxDxL mm	L1 mm	5	1
0,5x3x125	190	5	012500030
0,6x4x125	225	5	012500040
0,7x5x150	255	5	012500050

1251

screwholding screwdrivers
for cross head Phillips® screws



PHxDxL mm	L1 mm	5	1
0x4x125	225	5	012510000
1x5x125	225	5	012510010
2x6x175	280	5	012510020

1252/S5




1252/S5 1 012520001

1250 0,5x3x125-0,6x4x125
0,7x5x150 mm
1251 PH1x5x150-PH2x6x175 mm

1253

mains testing screwdriver 150/250V

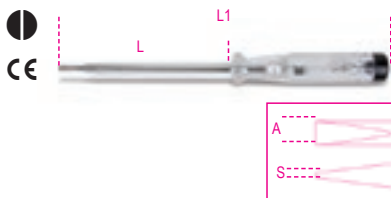

SxAxL mm	L1 mm	5	1
0,5x3,5x100	190	5	012530001

1253A


mains testing screwdriver 125/250V,
double insulation



SxAxL mm	L1 mm	5	1
0,5x3x15	150	5	012530010

1254

circuit testing screwdriver 6-24V

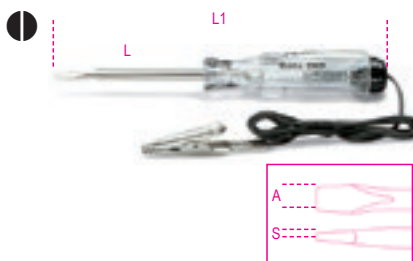

SxAxL mm	L1 mm	5	1
0,5x3x44	123	5	012540001

1256/C36-2

microscrewdriver with 36 interchangeable
4-mm bits and magnetic extension




1256/C36-2 1 012560100

	1256TX	T3 - T4 - T5 - T6 - T7 T8 - T9 - T10 - T15
	1256RTX	T6 - T7 - T8 - T9 - T10
	1256LP	0,8 - 1,2 - 1,5 - 1,8 - 2 - 2,5 3 - 3,5 - 4 mm
	1256PE	0,7 - 0,9 - 1,3 - 1,5 - 2 mm
	1256PH	PH000 - PH00 - PH0 - PH1
	1256PZ	PZ000 - PZ00 - PZ0 - PZ1
	1256/20	
	1256/30	

130x60x35 mm - 200 g

1256LP

4-mm bits
for slotted head screws

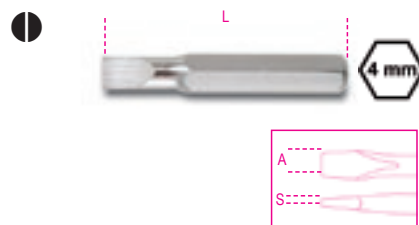

SxA mm	L mm	5	1
0.25x0.8	27	5	012560001
0.25x1.2	27	5	012560002
0.3x1.5	27	5	012560003
0.35x1.8	27	5	012560004
0.4x2.0	27	5	012560005
0.4x2.5	27	5	012560006
0.5x3.0	27	5	012560007
0.6x3.5	27	5	012560008
0.8x4.0	27	5	012560009

1256PH

4-mm bits
for cross head Phillips® screws



PH	L mm	5	1
000	27	5	012560011
00	27	5	012560012
0	27	5	012560013
1	27	5	012560014

1256PZ

4-mm bits
for slotted head Pozidriv® - Supradriv® screws



PZ	L mm	5	1
000	27	5	012560061
00	27	5	012560062
0	27	5	012560063
1	27	5	012560064

1256PE

4-mm bits
for hexagon head screws



mm	L mm	5	1
0.7	27	5	012560021
0.9	27	5	012560022
1.3	27	5	012560023
1.5	27	5	012560024
2.0	27	5	012560025

1256TX

4-mm bits
for Torx® head screws



Symbol	L mm	QTY	Part No.
T3	27	5	012560041
T4	27	5	012560042
T5	27	5	012560043
T6	27	5	012560044
T7	27	5	012560045
T8	27	5	012560046
T9	27	5	012560047
T10	27	5	012560048
T15	27	5	012560049

1256RTX

4-mm bits
for Tamper Resistant Torx® head screws



Symbol	L mm	QTY	Part No.
T6	27	5	012560051
T7	27	5	012560052
T8	27	5	012560053
T9	27	5	012560054
T10	27	5	012560055

1256/20

hexagon drive extension, 4 mm



Part No.	QTY	Part No.
1256/20	5	012560092

1256/30

4-mm bit holder with handle



L mm	QTY	Part No.
110	2	012560097

1257LP

micro-screwdrivers
for slotted head screws



SxD mm	L mm	QTY	Part No.
0,25x1,2	60	5	012570012
0,23x1,5	60	5	012570015
0,3x1,8	60	5	012570018
0,4x2	60	5	012570020
0,4x2,5	60	5	012570024
0,5x3	60	5	012570030
0,6x3,5	60	5	012570035
0,8x4	60	5	012570040



Part No.	QTY	Part No.
1257LP/S8	1	012570200

0,2x1,2-0,25x1,5
0,3x1,8-0,4x2-0,4x2,5
0,5x3-0,6x3,5-0,8x4 mm

1257PH

micro-screwdrivers
for cross-head Phillips® screws



PH	L mm	QTY	Part No.
00	60	5	012570060
0	60	5	012570063
1	60	5	012570066

1257LPH/S8



Part No.	QTY	Part No.
1257LPH/S8	1	012570210

1257PH PH00-PH0-PH1
1257LP 0,4x2-0,4x2,5-0,5x3
0,6x3,5-0,8x4 mm

1257ES

micro-screwdrivers hexagon male ends



mm	L mm	QTY	Part No.
0,9	60	5	012570045
1,3	60	5	012570046
1,5	60	5	012570047
2	60	5	012570048
2,5	60	5	012570049
3	60	5	012570050

1257ESB/S8



Part No.	QTY	Part No.
1257ESB/S8	1	012570230

1257ES 0,9-1,3-1,5-2-2,5-3 mm
1257BE 4-5 mm

1257TX

micro-screwdrivers for Torx®
head screws



Symbol	L mm	QTY	Part No.
T5	60	5	012570075
T6	60	5	012570076
T7	60	5	012570077
T8	60	5	012570078
T9	60	5	012570079
T10	60	5	012570080
T15	60	5	012570081
T20	60	5	012570082



Part No.	QTY	Part No.
1257TX/S8	1	012570220

T5-T6-T7-T8
T9-T10-T15-T20

1257BE

micro-screwdrivers hexagon socket wrenches



mm	L mm	QTY	Part No.
3,2	60	5	012570085
4	60	5	012570086
5	60	5	012570087
5,5	60	5	012570088



The BetaGrip screwdrivers are the fruit of Beta's long expertise in screwdriver design and close cooperation with the mechanics of motor racing teams.

New, one-of-a-kind technical solutions capable of satisfying the most demanding professionals' requirements have been used with a view to achieving the highest standards as regards ergonomics, strength and quality of the materials.

- The **blade** is made from special steel with a high silicon, chromium and vanadium content, to ensure improved performance in terms of torsional and flexural strength. A non-glare, matt chrome-plated finish has been chosen.
- The **geometry of the tip** has been designed to ensure perfect coupling between the blade and the screw head. The phosphate-coated finish prevents the tip from getting oxidized, while maintaining precise profiles.
- The **texture** has been inspired by the treads of Racing tyres, developed to maximize grip on different grounds. Hence it ensures effective screwdriver hold under any working conditions, for enhanced precision and control when fitting the tip onto the screw.



1260

screwdrivers for slotted head screws



ISO 2380

SxAxL mm	L1 mm	Ø mm	W	IT
0,4x2,5x50	150	2,5	5	012600003
0,4x2,5x75	175	2,5	5	012600006
0,5x3x75	175	3,0	5	012600009
0,5x3x100	200	3,0	5	012600012
0,6x3,5x75	175	3,5	5	012600018
0,6x3,5x100	200	3,5	5	012600021
0,8x4x100	208	4,0	5	012600030
0,8x4x125	233	4,0	5	012600033
0,8x4x150	258	4,0	5	012600036
1x5,5x100	208	5,0	5	012600039
1x5,5x125	233	5,0	5	012600040
1x5,5x150	258	5,0	5	012600042
1,2x6,5x100	219	6,0	5	012600048
1,2x6,5x125	244	6,0	5	012600050
1,2x6,5x150	269	6,0	5	012600051
1,2x8x150	277	8,0	3	012600057
1,2x8x200	327	8,0	3	012600060
1,6x10x200	327	9,5	3	012600066
2x12x250	377	10	3	012600069
2x14x250	377	10	2	012600073



1260/S6

0,4x2,5x75-0,5x3x75-0,8x4x125
1x5,5x150-1,2x6,5x150-1,2x8x200 mm

W IT
1 012600306

1260N

screwdrivers for slotted head screws,
extra-short series



ISO 2380

SxAxL mm	L1 mm	Ø mm	W	IT
0,8x4x30	87	4	5	012600103
1,2x6,5x30	87	6	5	012600106



1260E

screwdrivers for slotted head screws with hexagon bolsters



ISO 2380

SxAxL mm	L1 mm	Ø mm		
1,2x6,5x150	269	6,0	3	012600156
1,2x8x175	301	8,0	3	012600157
1,6x10x200	327	9,5	2	012600159
2x12x250	377	9,5	2	012600162

1260MC

screwdriver for slotted head screws, coloured



SxAxL mm	L1 mm	Ø mm		
0,4x2,5x50	150	2,5	3	012602003
0,6x3,5x75	175	3,5	3	012602018
0,8x4x100	208	4,0	3	012602030
1x5,5x125	233	5,0	5	012602040
1,2x6,5x150	269	6,0	5	012602051

1262

screwdrivers for cross head Phillips® screws



UNI/ISO 8764

PHxDxL mm	L1 mm		
0x3x60	160	5	012620003
0x3x100	200	5	012620006
1x4,5x80	188	5	012620009
1x4,5x120	228	5	012620012
2x6x100	219	5	012620018
2x6x150	269	5	012620021
3x8x150	277	3	012620024
4x10x200	327	3	012620027



1262/S4

PH0x3x60-PH1x4,5x80
PH2x6x100-PH3x8x150 mm

1 012620304

1262N

screwdrivers for cross head Phillips® screws, extra-short series



UNI/ISO 8764

PHxDxL mm	L1 mm		
1x4,5x30	87	5	012620103
2x6x30	87	5	012620106

1262E

screwdrivers for cross head Phillips® screws with hexagon bolsters



UNI/ISO 8764

PHxDxL mm	L1 mm		
2x6x150	269	3	012620153
3x8x175	302	3	012620156
4x10x200	327	2	012620159

1262L

screwdrivers for cross head Phillips® screws, long series



UNI/ISO 8764-1

PHxDxL mm	L1 mm		
0x3x300	400	3	012620203
1x4,5x300	400	3	012620205
1x4,5x400	508	3	012620206
2x6x400	519	3	012620209

1262MC

screwdriver for cross head Phillips® screws, coloured



PHxDxL mm	L1 mm		
0x3x60	160	3	012622003
1x4,5x80	188	3	012622009
2x6x100	219	3	012622018

1263/D...

set of screwdrivers



1263/D6			
1260	0,5x3x75-0,8x4x100 1x5,5x125-1,2x6,5x150 mm	1	012630006
1262	PH1x4,5x80-PH2x6x100 mm		



1263/D7			
1262	PH0x3x60 PH1x4,5x80 PH2x6x100 mm	1	012630017
1264	0,5x2,5x60-0,6x3x100 0,8x4x125-1x5x125 mm		



1263/D7PZ			
1260	0,5x3x75-0,8x4x100 1x5,5x150-1,2x6,5x150 mm	1	012630007
1269PZ	PZ0 - PZ1 - PZ2		



1263/D8			
1260	0,4x2,5x50-0,5x3x75 0,8x4x100-1x5,5x125 1,2x6,5x150 mm	1	012630008
1262	PH0x3x60-PH1x4,5x80 PH2x6x100 mm		



1263/D10			
1260	0,5x3x75-0,6x3,5x100 0,8x4x125-1x5,5x150 1,2x6,5x150 mm	1	012630010
1260N	0,8x4x30		
1262	PH0x3x60-PH1x4,5x80 PH2x6x100 mm		
1262N	PH1x4,5x30		

1263/S12

set of 12 screwdrivers



1263/S12 1 012630112

1260	0,4x2,5x50-0,5x3x75 0,6x3,5x100-0,8x4x125 1x5,5x125-1,2x6,5x150 1,2x8x200-1,6x10x200 mm
1262	PH0x3x60-PH1x4,5x80 PH2x6x100-PH3x8x150 mm

1263MC/D8

set of 8 coloured screwdrivers



1263MC/D8 1 012632008

1260MC	0,4x2,5x50-0,5x3x75 0,8x4x100-1x5,5x125 1,2x6,5x150 mm
1262MC	PH0x3x60-PH1x4,5x80 PH2x6x100 mm

1264

screwdrivers for headless slotted screws



SxDxL mm	L1 mm		
0,5x2,5x60	160	5	012640003
0,6x3x75	175	5	012640006
0,6x3x100	200	5	012640009
0,8x4x100	208	5	012640012
0,8x4x125	233	5	012640015
1x5x125	233	5	012640018
1x5x150	258	5	012640021
1,2x6,5x150	269	5	012640024



1264/S5 1 012640305
0,5x2,5x60-0,6x3x75
0,8x4x100-1x5x125-1,2x6,5x150 mm

1264L

screwdrivers for headless slotted screws,
long series



SxDxL mm	L1 mm		
0,5x2,5x200	300	3	012640203
0,6x3x300	400	3	012640206
0,8x4x400	508	3	012640209
1x5x400	508	3	012640215
1,2x6,5x400	519	3	012640218

1265ES

hexagon drivers
with handles



mm	L mm	L1 mm		
1,5	100	200	3	012650015
2	100	200	3	012650020
2,5	100	200	3	012650025
3	100	200	3	012650030
4	100	208	3	012650040
5	100	219	3	012650050
6	125	244	3	012650060
8	150	277	2	012650080



1265ES/S8 1 012650308
1,5-2-2,5-3-4-5-6-8 mm

1266BP

ball head hexagon drivers
with handles



mm	L mm	L1 mm		
2	100	200	3	012660020
2,5	100	200	3	012660025
3	125	225	3	012660030
4	125	233	3	012660040
5	120	239	3	012660050
6	140	259	3	012660060
8	160	287	2	012660080
10	160	287	2	012660100



1266BP/S8 1 012660308
2-2,5-3-4-5-6-8-10 mm

1267TX

drivers for Torx® head screws,
with handles



mm	L mm	L1 mm	Ø mm		
T5	50	150	3	5	012670005
T6	50	150	3	5	012670006
T7	50	150	3	5	012670007
T8	60	160	3	5	012670008
T9	60	167	4	5	012670009
T10	80	188	4	5	012670010
T15	80	188	4	5	012670015
T20	100	208	4,5	5	012670020
T25	100	208	5	5	012670025
T27	115	234	6	5	012670027
T30	115	234	6	5	012670030
T40	130	257	7	2	012670040
T45	130	257	8	2	012670045



1267TX/D7
T6-T8-T10-T15
T20-T25-T30

1 012670307



1267TX/S13
T5-T6-T7-T8-T9
T10-T15-T20-T25
T27-T30-T40-T45

1 012670312

1267MC/TX

drivers for Torx® head screws, with handles, coloured



	L mm	L1 mm	Ø mm		
T6	50	150	3	5	012672006
T8	60	160	3	5	012672008
T10	80	188	4	5	012672010
T15	80	188	4	5	012672015
T20	100	208	4,5	5	012672020
T25	100	208	5	3	012672025
T30	115	234	6	3	012672030



1267MC/TX-D7
T6-T8-T10-T15
T20-T25-T30

1 012672307

1268RTX

screwdrivers for Tamper Resistant Torx® head screws, with handles



	L mm	L1 mm	Ø mm		
T9	60	167	4,0	3	012680009
T10	80	188	4,0	3	012680010
T15	80	188	4,0	3	012680015
T20	100	208	4,5	3	012680020
T25	100	208	5,0	3	012680025
T27	115	234	6,0	3	012680027
T30	115	234	6,0	3	012680030
T40	130	257	7,0	2	012680040



1268RTX/S8
T9-T10-T15-T20
T25-T27-T30-T40

1 012680307

1269PZ

screwdrivers for cross head Pozidriv®-Supadriv® screws



UNI/ISO 8764

	L mm	L1 mm		
PZ 0	60	160	5	012690000
1	80	188	5	012690001
2	100	219	5	012690002
3	150	277	3	012690003
4	200	327	3	012690004



1269PZ/S4
PZ0-PZ1-PZ2-PZ3

1 012690304

1269N/PZ

screwdrivers for cross head Pozidriv®-Supadriv® screws, extra-short series



UNI/ISO 8764

	L mm	L1 mm		
PZ 1	30	87	5	012690011
2	30	87	5	012690012

1281BG

interchangeable blade screwdriver handle



L mm	Ø mm		
118	10	5	012810280

1281PM

quick-fit magnetic bit holder



L mm		
165	5	012810292

1281PB

socket holder with 1/4" male drive



L mm		
175	5	012810293

1281LP

reversible screwdrivers for slotted head screws



1281LP/1 0,8x4-1,2x6,5 mm	5	012810302
1281LP/2 1x5,5-1,2x6,5 mm	5	012810304

1281PH

reversible screwdrivers
for cross head Phillips® screws



PH		
1-2	5	012810310
2-3	5	012810312

1281LPH

reversible screwdrivers
for slotted and Phillips® head screws



1281LPH/1	5	012810321
PH0-0,8x4 mm		
1281LPH/2	5	012810322
PH1-1x5,5 mm		
1281LPH/3	5	012810323
PH2-1,2x6,5 mm		

1281PZ

reversible screwdrivers
for cross head Pozidriv®-Supadriv® screws



PZ		
1-2	5	012810330
2-3	5	012810332

1281PE

reversible ball head hexagon
screwdriver blades



mm		
2,5	5	012810342
3	5	012810343
4	5	012810344
5	5	012810345
6	5	012810346

1281TX

reversible screwdrivers for Torx® head screws



1281TX/1	5	012810349
T6-T8		
1281TX/2	5	012810350
T7-T9		
1281TX/3	5	012810351
T10-T15		
1281TX/4	5	012810352
T20-T25		
1281TX/5	5	012810353
T30-T40		

1281RTX

reversible screwdrivers
for Tamper Resistant Torx® head screws



1281RTX/3	5	012810361
T10-T15		
1281RTX/4	5	012810362
T20-T25		
1281RTX/5	5	012810363
T30-T40		

1281BG/A9

assortment of 9 reversible screwdrivers
and 1 accessory in case



1281BG/A9	1	012810520
-----------	---	-----------

1281BG		
1281LPH/1	PH0-0,8x4 mm	
1281LPH/2	PH1-1x5,5 mm	
1281LPH/3	PH2-1,2x6,5 mm	
1281PZ/1	PZ1-PZ2	
1281PE	2,5 mm	
1281PE	3 mm	
1281PE	4 mm	
1281PE	5 mm	
1281PE	6 mm	

1281BG-TX/A8

assortment of 8 reversible screwdrivers
and 1 accessory in case



1281BG-TX/A8	1	012810530
--------------	---	-----------

1281BG		
1281LPH/1	PH0-0,8x4 mm	
1281LPH/2	PH1-1x5,5 mm	
1281LPH/3	PH2-1,2x6,5 mm	
1281TX/1	T6-T8	
1281TX/2	T7-T9	
1281TX/3	T10-T15	
1281TX/4	T20-T25	
1281TX/5	T30-T40	

1281BG/B28NA

assortment of 16 reversible screwdrivers, 9
1/4" sockets, 2 accessories and 1 handle, in
durable polyester wallet



1281BG/B28NA	1	012810511
--------------	---	-----------

900	4 - 4,5 - 5 - 5,5 6 - 7 - 8 - 9 - 10 mm	
1281BG		
1281PB	■ 1/4	
900/25		
1281LP/1	0,8x4 - 1,2x6,5 mm	
1281LP/2	1,0x5,5 - 1,2x6,5 mm	
1281PH/1	PH1 - PH2	
1281PH/2	PH2 - PH3	
1281PZ/1	PZ1 - PZ2	
1281PZ/2	PZ2 - PZ3	
1281PE	2,5 - 3 - 4 - 5 - 6 mm	
1281TX/1	T6 - T8	
1281TX/2	T7 - T9	
1281RTX/3	T10 - T15	
1281RTX/4	T20 - T25	
1281RTX/5	T30 - T40	

2002/BV7-ZIP	1	020020060
--------------	---	-----------

The **BetaMax screwdrivers** rely on several technical characteristics to make work operations even easier.

- The handle is inspired by the triangular section, which ensures optimal screwing, based on a 120° range, in line with maximum wrist rotation.
- The design provides remarkable ergonomic properties, during both quick screwing and tightening operations.
- The chrome-plating free tip ensures perfect coupling with the screw and is protected from oxidation with phosphate-coating treatment.

1290

screwdrivers for slotted head screws



ISO 2380

SxAxL mm	L1 mm	Ø mm		
0,4x2,5x50	146	2,5	5	012900003
0,4x2,5x75	171	2,5	5	012900006
0,5x3x75	171	3,0	10	012900009
0,5x3x100	196	3,0	10	012900012
0,6x3,5x75	171	3,5	10	012900018
0,6x3,5x100	196	3,5	10	012900021
0,8x4x100	196	4,0	10	012900030
0,8x4x125	221	4,0	10	012900033
0,8x4x150	246	4,0	10	012900036
1x5,5x100	209	5,0	10	012900039
1x5,5x150	259	5,0	10	012900042
1,2x6,5x100	220	6,0	10	012900048
1,2x6,5x150	270	6,0	10	012900051
1,2x8x150	282	7,0	3	012900057
1,2x8x200	332	7,0	3	012900060
1,6x10x200	332	8,0	3	012900066
2x12x250	382	10	2	012900069

1290/S

screwdriver set



1290/S5			1 012900305

1290	0,5x3x75-0,8x4x100 -1x5,5x150 1,2x6,5x150 -1,2x8x150 mm
------	--

1290/S9X			1 012900319

1290	0,4x2,5x75 - 0,5x3,5x100 0,8x4x125 - 1x5,5x150 1,2x6,5x150 - 1,2x8x200 1,6x10x200 mm
------	---

1290N	0,8x4x30 -1,2x6,5x30 mm
-------	-------------------------

1290N

screwdrivers for slotted head screws
extra short series




ISO 2380

SxAxL mm	L1 mm	Ø mm		
0,8x4x30	86	4	5	012900103
1,2x6,5x30	86	6	5	012900106

1292

screwdrivers for cross head
Phillips® screws

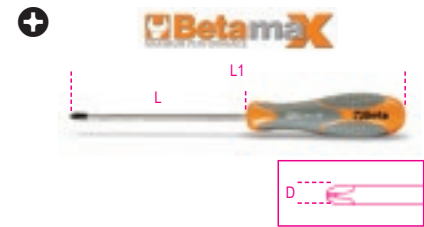

UNI/ISO 8764

PHxDxL mm	L1 mm		
0x3x60	156	10	012920003
0x3x100	196	5	012920006
1x4,5x80	189	10	012920009
1x4,5x120	229	10	012920012
2x6x100	220	10	012920018
2x6x150	270	10	012920021
3x8x150	282	3	012920024
4x10x200	332	3	012920027



1292/S4			1 012920304

PH0x3x60-PH1x4,5x80
PH2x6x100-PH3x8x150 mm

1292N

screwdrivers for cross head
Phillips® screws
extra short series




UNI/ISO 8764

PHxDxL mm	L1 mm		
1x4,5x30	86	5	012920103
2x6x30	86	5	012920106

1292L

screwdrivers for cross head
Phillips® screws, long series

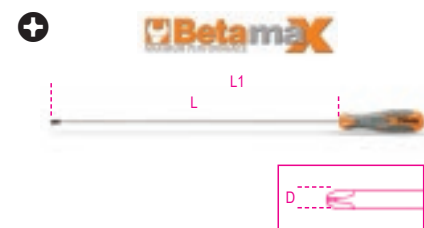

UNI/ISO 8764-1

PHxDxL mm	L1 mm		
0x3x300	396	3	012920203
1x4,5x400	509	3	012920206
2x6x400	520	3	012920209



1293/D...

screwdriver set

Betamax



1293/D6 1 012930401

1290 0,6x3,5x75-1x5,5x150
1,2x6,5x150 mm
1292 PH0x3x60 -PH1x4,5x80
PH2x6x100 mm




1293/D8 1 012930403

1290 0,5x3x75-0,8x4x100
1x5,5x150-1,2x6,5x150
1,2x8x150 mm
1292 PH0x3x60 -PH1x4,5x80
PH2x6x100 mm

1293/S...

screwdriver set

Betamax



1293/S8 1 012930208

1290 2,5x50-3x75-4x100-5,5x150
6,5x150 mm
1292 PH0x3x60-PH1x4,5x80
PH2x6x100 mm



1293/S10 1 012930201

1290 0,4x2,5x50 -0,6x3,5x100
1x5,5x100-1,2x6,5x150
1,2x8x150-1,6x10x200 mm
1292 PH0x3x60 -PH1x4,5x80
PH2x6x100-PH3x8x150 mm



1293/S12 1 012930203

1290 0,5x3x75-0,8x4x125
1x5,5x150-1,2x6,5x150
1,2x8x200 mm
1290N 0,8x4x30 mm
1292 PH0x3x60 -PH1x4,5x80
PH2x6x100-PH3x8x150 mm
1292N PH1x4,5x30-PH2x6x30 mm



1293/S7 1 012930207

1292 PH0x3x60 -PH1x4,5x80
PH2x6x100 mm
1294 0,5x2,5x60-0,6x3x75
0,8x4x100-1x5x125 mm



1293ES

hexagon drivers with handles



mm	L mm	L1 mm	Ø mm	1	2
2	100	196	3	5	012930001
2,5	100	196	4	5	012930002
3	100	196	4	5	012930003
4	100	196	5	5	012930004
5	100	209	6	5	012930005
6	125	245	7	5	012930006
8	150	282	10	2	012930008



1293ES/S7 1 012930057
2-2,5-3-4-5-6-8 mm

1293BP

ball head hexagon drivers with handles



mm	L mm	L1 mm	1	2
2	100	196	5	012930501
2,5	100	196	5	012930502
3	100	196	5	012930503
4	100	196	5	012930506
5	100	209	5	012930509
6	125	245	5	012930512
8	150	282	2	012930515



1293BP/S7 1 012930558
2-2,5-3-4-5-6-8 mm

1294

screwdrivers for headless slotted screws



SxDxL mm	L1 mm	1	2
0,5x2,5x60	156	5	012940003
0,6x3x75	171	5	012940006
0,6x3x100	196	5	012940009
0,8x4x100	196	5	012940012
0,8x4x150	246	5	012940015
1x5x125	234	5	012940018
1,2x6,5x150	282	5	012940027



1294/S5 1 012940305

0,5x2,5x60-0,6x3x100
0,8x4x100-1x5x125
1,2x6,5x150 mm

1294L

screwdrivers for headless slotted screws long series



SxDxL mm	L1 mm	1	2
0,6x3x300	396	3	012940206
0,8x4x400	496	3	012940209
1x5x400	509	3	012940215
1,2x6,5x400	532	3	012940218

1295

impact screwdriver



1295 1 012950001
L mm 130

Beta
Quality Tools

1295/C14

impact screwdriver
with 14 insets and 1 socket holder



1295/C14 1 012950108

	866LP	1,2x6,5 - 1,6x10 mm
	866PH	PH2 - PH3
	866PZ	PZ2 - PZ3
	866PE	5 - 6 mm
	866TX	T27 - T30 - T40 - T45 - T50 - T55
	895/6	□ 1/2 - ○ 5/16
	1295	■ 1/2

170x100x35 mm - 1,3 kg

1297TX

drivers for Torx® head screws,
with handles



⊕	L mm	L1 mm	Ø mm	1	2
T6	50	146	3,0	5	012970006
T7	50	146	3,0	5	012970007
T8	60	156	3,0	5	012970008
T9	60	169	4,0	5	012970009
T10	80	189	4,0	5	012970010
T15	80	189	4,0	5	012970015
T20	100	209	4,5	5	012970020
T25	100	209	5,0	5	012970025
T27	115	235	6,0	5	012970027
T30	115	235	6,0	5	012970030
T40	130	262	7,0	2	012970040
T45	130	262	8,0	2	012970045



1297TX/S12 1 012970312
T6-T7-T8-T9-T10
T15-T20-T25-T27
T30-T40-T45



1297TX/D6 1 012970409
T10-T15-T20
T25-T27-T30

1297TX/L

drivers for Torx® head screws, long series



⊕	L mm	L1 mm	Ø mm	1	2
T15	210	319	4,0	2	012970115
T20	210	319	4,5	2	012970120
T25	210	319	5,0	2	012970125
T30	210	330	6,0	2	012970130
T45	210	342	8,0	2	012970145



1297TX/L-S5 1 012970325
TX/L15-TX/L20-TX/L25-
TX/L30-TX/L45

1298RTX

screwdrivers for Tamper Resistant Torx®
head screws, with handles



⊕	L mm	L1 mm	Ø mm	1	2
T9	60	169	4,0	5	012980009
T10	80	189	4,0	5	012980010
T15	80	189	4,0	5	012980015
T20	100	209	4,0	5	012980020
T25	100	209	4,5	5	012980025
T27	115	235	5,5	5	012980027
T30	115	235	6,0	5	012980030
T40	130	262	7,0	2	012980040



1298RTX/S8 1 012980308
T9-T10-T15-T20
T25-T27-T30-T40

1299PZ

screwdrivers for cross head
Pozidriv®-Supadriv® screws



UNI/ISO 8764

PZ	L mm	L1 mm	1	2
0	60	156	5	012990000
1	80	189	5	012990003
2	100	220	5	012990006
3	150	282	2	012990009
4	200	332	2	012990012



1299PZ/S6 1 012990306
1299PZ PZ0-PZ1-PZ2-PZ3
1299N/PZ PZ1-PZ2

1299N/PZ

screwdrivers for cross head
Pozidriv®-Supadriv® screws
extra short series



UNI/ISO 8764

PZ	L mm	L1 mm	1	2
1	30	86	5	012990021
2	30	86	5	012990024

Beta
Quality Tools