


Drill Pipe Tongs



DA4174-L08

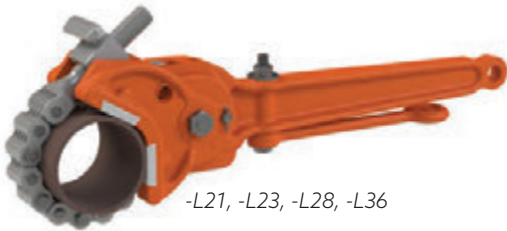

-L21, -L23, -L28, -L36



-C09, -C10, -C12, -C18

- » Designed for making up and breaking out drill pipe, casing and pneumatic drills on light rigs
- » Easy to handle, is quickly applied to workpiece, and withstands rugged use
- » Often furnished as original equipment by rig manufacturers
- » Sizes capable of delivering up to 95,000 ft.-lbs. torque

Specifications

Part No.	O.D.*	Gripping Width	Handle Length**	Weight***
DA1344	1" - 6"	4"	8"	13 lbs.
DA2344-C12	2-1/8" - 5"	4.44"	12"	29 lbs.
DA2344-L21	2-1/8" - 5"	4.44"	21"	35 lbs.
DA4174-L08	3" - 8-1/4"	5.00"	8"	33 lbs.
DA4174-C12	3" - 8-1/4"	5.00"	12"	41 lbs.
DA4174-L21	3" - 8-1/4"	5.00"	21"	45 lbs.
DA4174-L36	3" - 8-1/4"	5.00"	36"	58 lbs.
DA6184-C10	4-1/4" - 10-3/4"	4.88"	10"	49 lbs.
DA6184-L36	4-1/4" - 10-3/4"	4.88"	36"	76 lbs.
DA8184-C09	4" - 14"	7.25"	9"	91 lbs.
DA8184-C18	4" - 14"	7.25"	18"	100 lbs.
DA8184-L23	4" - 14"	7.25"	23"	120 lbs.
DA8184-L28	4" - 14"	7.25"	28"	129 lbs.
DA8184-L36	4" - 14"	7.25"	36"	134 lbs.

*Chain assemblies must be ordered separately. See Chain Selection Guide on product page of website.

**Call factory for torque arm lengths.

***Weights do not include chain.

>>> **Maximum Working Loads** <<<

Torques vary according to O.D.

See Torque Tables on product page of website.



WARNING! Do Not Exceed Maximum Working Load! Overloading may result in SERIOUS INJURY or DEATH!
Always use a load cell or other calibrated indicating device to monitor the line pull on the tong to avoid overload. Read Safe Practices & Procedures Manual prior to operation. Do not operate without a manual.
Follow OSHA, NSC, etc. standards, safe practices, and procedures.



NOTE: Safe Practices & Procedures Manual can be found on pages 31-37 of this product guide.