

combination contact/non-contact
digital tachometer



TECHNICAL DATA

- For measuring:
 - non-contact rotational speed (rpm)
 - contact rotational (rpm)
 - linear surface speed (m/min or ft/min).
- 5-digit LCD display.
- Scale:
 - non-contact speed 2.5÷99,999 rpm
 - contact speed 0.5÷19,999 rpm
 - linear surface speed 0.05÷1,999.9 m/min.
- Frequency: 0.8 sec.
- Power supply: 4 1.5V batteries, AA size, or 6V power supply unit (not included).
- Supplied with the following:
 - adaptor for contact tip measurement;
 - male (contact) rubber tip (2 pcs.);
 - female (contact) rubber tip (1 pcs.);
 - linear measurement tape (1 pcs.);
 - reflecting tapes;
 - instruction manual;
 - plastic case.

1760/TC2 L 230 mm H 74 mm 1 017600161

1760R/TC2

set of reflecting tapes for item 1760/TC2



1760R/TC2 1 017600561



digital infrared thermometer
with dual laser aiming system



TECHNICAL DATA

- Range: -50 °C to +800 °C / -58 °F to +1472 °F
- Scale selection: °C/°F
- Accuracy: ±1.0% or ±1.0 °C to 20 °C
- Laser power: <1mW
- Response: 150ms
- Emissivity: 0.10-1.0 adjustable
- Distance ratio: (D:S) 20:1
- Operating temperature: 0 °C ÷ 50 °C / 32 °F ÷ 122 °F
- Operating humidity: 10% to 90% RH
- Backlit LCD display
- Data storage function
- Auto power off
- Power supply: 1 9V battery (included)
- Soft cloth case (included)
- Operating manual

1760/IR800 1 017600380

1760/IR1600


digital infrared thermometer
with laser aiming system



TECHNICAL DATA

- Range: da -50 °C to +1600 °C / -58 °F to +2912 °F
- Scale selection: °C/°F
- Accuracy: ±1.5% or ±2 °C to 20 °C
- Laser power: <1mW
- Response: 1sec
- Emissivity: 0.10-1.0 adjustable
- Distance ratio: (D:S) 50:1
- Operating temperature: 0 °C ÷ 50 °C / 32 °F ÷ 122 °F
- Operating humidity: 10% to 90% RH
- Backlit LCD display
- Data storage function
- Auto power off
- Power supply: 1 9V battery (included)
- Hard case with aluminium tripod
- Operating manual


locking wire pliers

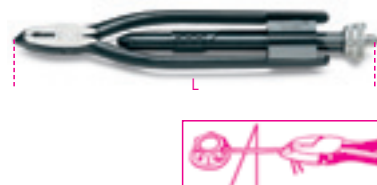

L 255 mm 1 017610001

1761RS/1

reversible locking wire pliers

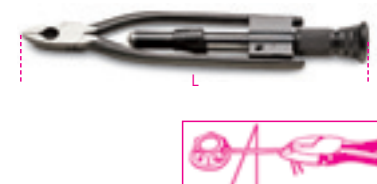

L 220 mm 1 017610030

1762

revolving punch pliers



∅ 2-2,5-3 mm L 210 mm 2 017620001
3,5-4-4,5

1765/C24

cases with 24 tools
for pulling out car radios



1765/C24 1 017650001

1766

double suction lifter



max